Linear, direct/indirect, GEN 20

Arven 354

GEN 20 arch linear light

Project	
Type	
Date	

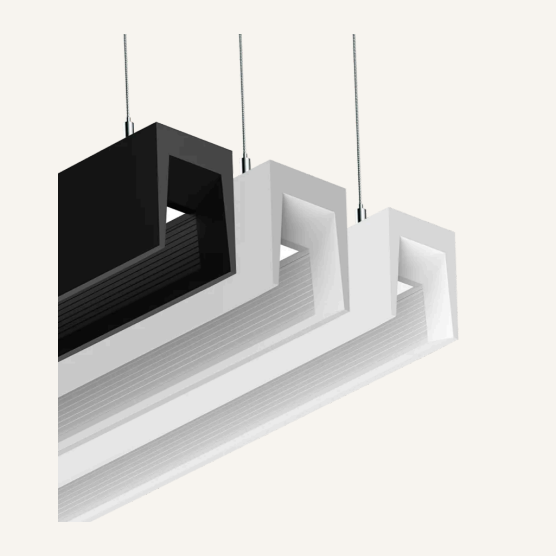

Arven 354 features a refined, low-glare diffusion system, offering soft, broad illumination through its unique arch-shaped profile. It is available in 4' and 8' lengths, supporting continuous runs for seamless integration into architectural spaces.

Lumen output	2,400 to 8,000 lm
Colour temperature	3000K / 3500K / 4000K, selectable
Wattage	30 to 100 W
Sizes	4FT(1178 mm), 8FT(2295.6mm)
Efficacy	65-115 Lm/W, 65-115lm/W
Voltage	AC120-277V
Dimming	0-10V(1%-100%)
CRI	>90

ETL | 5-year warranty

Ordering information

Model	Length / pattern	Wattage	Luminous Efficacy	Luminous Flux	Up & Down Proportion	CCT Select	Voltage	Dimming	CRI	Flicker
WL-20LSUD4FT50WA2D1HV	4FT(1178 mm)	30/40/50W	65-115 Lm/W	1950-5750 Lm	50%+50% / 30%+70% / 0%+100%	30/35/40K	AC120-277V	0-10V(1%-100%)	>90	<5%
WL-20LSUD8FT100WA2D1HV	8FT(2295.6mm)	60/80/100W	65-115lm/W	3900-11500 Lm	50%+50%/30%+70%/0%+100%	30/35/40K	AC120-277V	0-10V(1%-100%)	>90	<5%

Arven 354

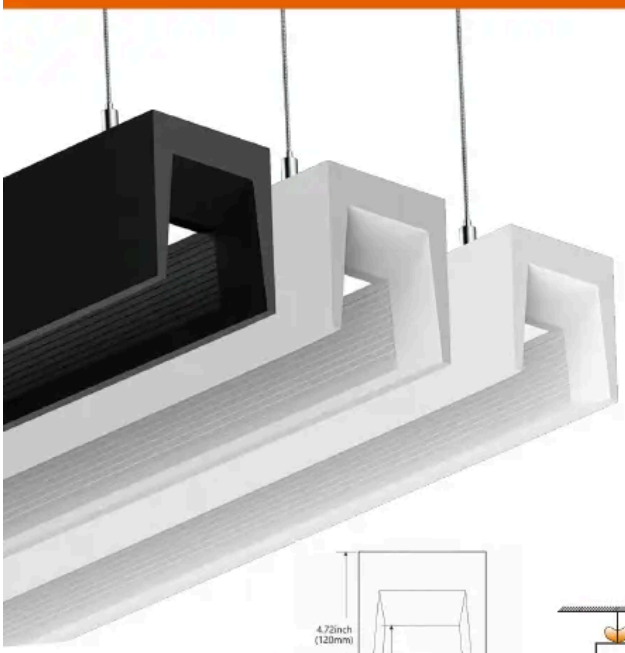

Arven 354
GEN20 Arch Linear Light

Specifications

Switch Select
2,400 - 8,000 Lumens

CCT Select
3000K/3500K/4000K CCT

Wattage Select
30 - 100 Watts

Intertek

5 YEAR WARRANTY



Linkable





Pendant **Mount**

Features

Single-Sided Light Output Version

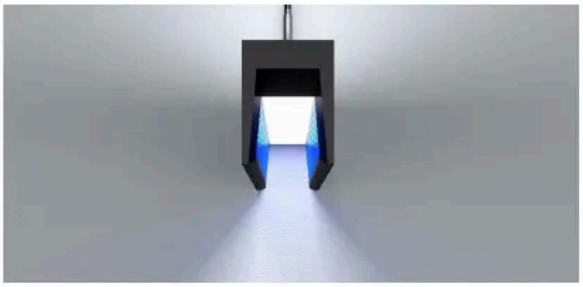

Light from the top only, providing focused and clean lighting.

Features

Internal watt & CCT selectable

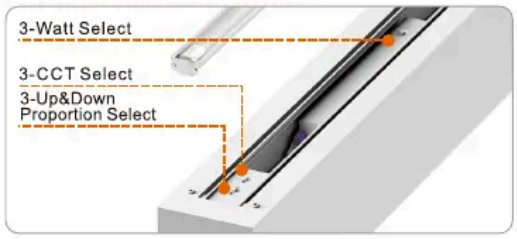

Flexible Design | Customizable Side Panels

Aluminum panels for single-sided version, available in multiple finishes and colors.



Red Purple Blue Yellow Custom Color

Model	Size	Watts Select	Lumens	Efficacy	CCT Select	Voltage	Dimming	CRI	Flicker
WL-20LSUD4FT50WA2D1HV(XXK-XXK-XXK)-YY	4FT	30W/40W/50W	2400 lm/3200 lm/4000 lm	80 lm/W	3000K 3500K 4000K	AC120-277V	0-10V (1%-100%)	>90	<5%
WL-20LSUD8FT100WA2D1HV(XXK-XXK-XXK)-YY	8FT	60W/80W/100W	4800 lm/6400 lm/8000 lm						
WL-20LSUD4FT50WA3D1HV(XXK-XXK-XXK)-YY	4FT	30W/40W/50W	2400 lm/3200 lm/4000 lm						
WL-20LSUD8FT100WA3D1HV(XXK-XXK-XXK)-YY	8FT	60W/80W/100W	4800 lm/6400 lm/8000 lm						