
Linear, direct/indirect, GEN 9

Arven 445

GEN 9 diffuse-reflection linear light

Project	
Type	
Date	

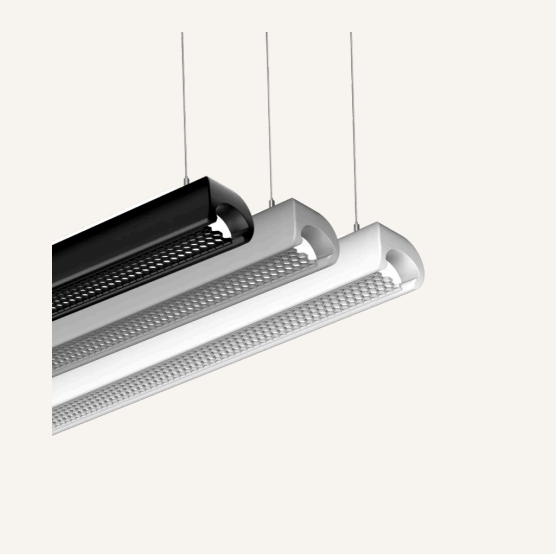

ARVEN 445 is a suspended linear luminaire featuring advanced reflection optics for glare-free, comfortable downlighting. Its refined structure and batwing light distribution deliver wide, uniform illumination, creating healthy and visually balanced environments.

Lumen output	3,000 to 10,000 lm
Colour temperature	3000K / 3500K / 4000K, selectable
Wattage	30 to 100 W
Sizes	4FT(1185mm), 8FT(2307mm)
Efficacy	100lm/W
Voltage	AC120-347V/120-277V
Dimming	0-10V(1%-100%)
CRI	>90

ETL | 5-year warranty

Ordering information

Model	Length	Wattage Select	Efficacy	Lumens	CCT Select	Voltage	Dimming	CRI
WL-9LSUD4FT50WB2D1HV	4FT(1185mm)	30W/40W/50W	100lm/W	3000Lm/4000Lm/5000Lm	30K/35K/40K	AC120-347V/120-277V	0-10V(1%-100%)	>90
WL-9LSUD8FT100WB2D1HV	8FT(2307mm)	60W/80W/100W	100lm/W	6000Lm/8000Lm/10000Lm	30K/35K/40K	AC120-347V/120-277V	0-10V(1%-100%)	>90

Arven 445



Arven 445

Diffuse reflection GEN9 Linear Light

Specifications

Switch Select
3,000 - 10,000 Lumens

CCT Select
3000K/3500K/4000K CCT

Wattage Select
30 - 100 Watts

Intertek


5 YEAR WARRANTY




Linkable




Pendant **Mount**



Features

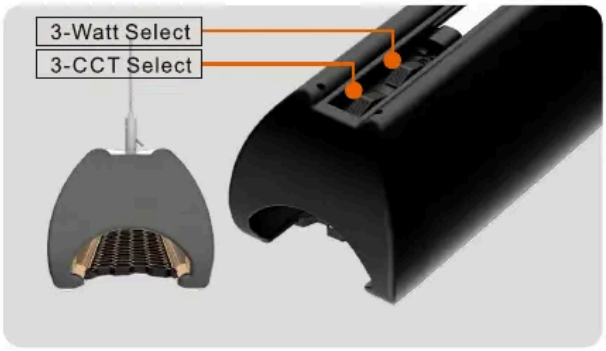

Beam Angles

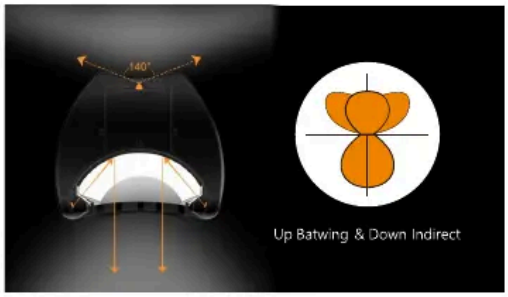

Arven 445	Length	Wattage Select	Output Lumen Up 30% Down 70%	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-9LSUD4FT50WB2D1HV	4'	30W/40W/50W	3000lm/4000lm/5000lm	100lm/W	3000K 3500K 4000K	AC120-347V	(1%-100%) 0-10V	>90
WL-9LSUD8FT100WB2D1HV	8'	60W/80W/100W	6000lm/8000lm/10000lm					

07