Cove

Cleaver G3 Exterior Cove Light

Exterior IP65 G3 cove light

Project	
Type	
Date	



Designed for humid environments, this IP65-rated cove light supports wall, ceiling, and surface mounting. Its ±60° rotatable bracket, anti-wobble design, and detachable safety rope ensure quick and secure installation.

Lumen output	1,100 to 4,400 lm
Colour temperature	2700K / 3000K / 3500K / 4000K, single CCT
Wattage	10 to 40 W
Sizes	1FT, 4FT
Efficacy	95-110 Lm/W, 100-110 Lm/W, 70 Lm/W, 80-85 Lm/W
Voltage	DC12V/120-277V
Dimming	0-10V (1%-100%), DMX512
CRI	>90
UGR	<28, <16, /

ETL | 5-year warranty | IP65 | Wet and dry | Fastship

Ordering information

Model	Size	Watt	LED	Beam Angle	Single CCT	Efficacy	Voltage	Dimming	CRI	UGR
WL-3COV1FT10WAD1UV-90-110(XXK)-YY	1FT	10W	RUNLUX	110°(PC Difuser)	27/30/35/40/50K	95-110 Lm/W	DC12V/120-277V	0-10V (1%-100%)	>90	<28
WL-3COV4FT10WAD1UV-90-110(XXK)-YY	4FT	40W	RUNLUX	110°(PC Difuser)	27/30/35/40/50K	100-110 Lm/W	DC12V/120-277V	0-10V (1%-100%)	>90	<28
WL-3COV1FT10WAD1UV-90-VVV(XXK)-YY	1FT	10W	LUMISEE	7×7°,10×10°,15×15°,18×18°24×24°,36×36°, 60×60°,12X24°,15×40°,15×55°, Asymmetric 25°(Lens)	27/30K	70 Lm/W	DC12V/120-277V	0-10V (1%-100%)	>90	<16
WL-3COV1FT10WAD1UV-90-VVV(XXK)-YY	1FT	10W	LUMISEE	7×7°,10×10°,15×15°,18×18°24×24°,36×36°, 60×60°,12X24°,15×40°,15×55°, Asymmetric 25°(Lens)	35/40/50K	80-85 Lm/W	DC12V/120-277V	0-10V (1%-100%)	>90	<16
WL-3COV4FT40WAD1UV-XX-VVV(XXK)-YY	4FT	40W	LUMISEE	7×7°,10×10°,15×15°,18×18°24×24°,36×36°, 60×60°,12X24°,15×40°,15×55°, Asymmetric 25°(Lens)	27/30K	70 Lm/W	DC12V/120-277V	0-10V (1%-100%)	>90	<16
WL-3COV4FT40WAD1UV-XX-VVV(XXK)-YY	4FT	40W	LUMISEE	7×7°,10×10°,15×15°,18×18°24×24°,36×36°, 60×60°,12X24°,15×40°,15×55°, Asymmetric 25°(Lens)	35/40/50K	80-85 Lm/W	DC12V/120-277V	0-10V (1%-100%)	>90	<16
WL-3COV1FT10WAMUV-XX-VVV(RGBW)-YY	1FT	10W	CERAMIC 3535	15×15°,24×24°,36×36°,60×60°, 15×40°,15×55°(Lens/PC Diffuser)	RGBW	60 Lm/W	DC12V/120-277V	DMX512	>90	/
WL-3COV4FT40WAMUV-XX-VVV(RGBW)-YY	4FT	40W	CERAMIC 3535	15×15°,24×24°,36×36°,60×60°, 15×40°,15×55°(Lens/PC Diffuser)	RGBW	60 Lm/W	DC12V/120-277V	DMX512	>90	/

CLEAVER G3



CLEAVER G3

Exterior IP65 G3 Cove Light

Specifications

Lumen Output
1,100 - 4,400 Lumens


Single CCT
2700K/3000K/3500K/4000K CCT

Single Wattage
10 - 40 Watts


Intertek · 5 YEAR WARRANTY · WET & DRY · IP65 · FASTSHIP




Linkable




Beam Angles

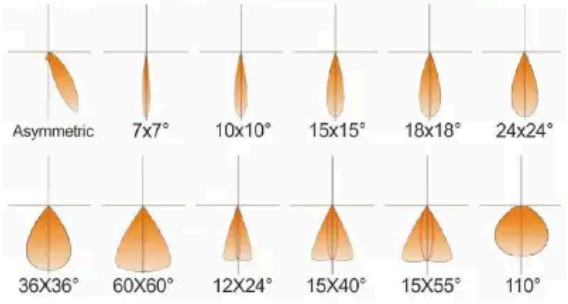

Mounting




Surface Mount



+/- 60 degrees adjustable angle. Adjust to 30 degrees for the highest point

RGBW Lighting Control Solution

▲ Supports RGBW lighting control: Bluetooth for easy scene switching, or DMX for professional control

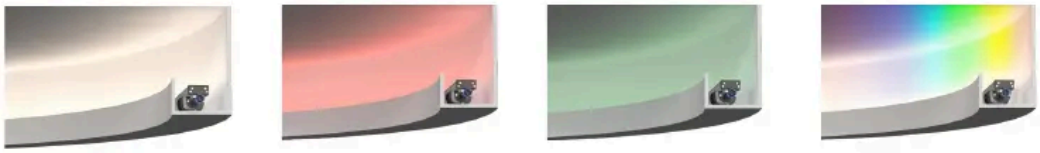

Model	Dimension	Wattage	LED	Beam angle	Single CCT	Efficacy	Lumens	Voltage	Dimming	CRI	UGR	SCDM
WL-3COV1FT10WAD1UV-90-110(XXK)-A	1FT L305xH54xW82.5mm	10W	RUNLUX	110° PC Clear Diffuser	2700K/ 3000K/ 3500K/ 4000K/ 5000K Single CCT	80 – 90 lm/W	800-900 lm	AC120-277V	0-10V (1-100%)	>90	≤28	≤3
WL-3COV4FT40WAD1UV-90-110(XXK)-A	4FT L1220xH54xW82.5mm	40W	RUNLUX			80 – 90 lm/W	3200-3600 lm					
WL-3COV1FT10WAD1UV-90-110(XXK)-B	1FT L305xH54xW82.5mm	10W	LUMILEDS			80 – 90 lm/W	800-900 lm					
WL-3COV4FT40WAD1UV-90-110(XXK)-B	4FT L1220xH54xW82.5mm	40W	LUMILEDS			80 – 90 lm/W	3200-3600 lm					
WL-3COV1FT10WAD1UV-90-XXXX(XXK)-C	1FT L305xH54xW82.5mm	10W	CREE	7×7°,10×10° 15×15°,18×18°, 24×24°,36×36° 60×60°,12×24°, 15×40°,15×55°, Asymmetric 25° Optic		65 – 80 lm/W	650 – 800 lm			>90		≤5
WL-3COV4FT40WAD1UV-90-XXXX(XXK)-C	4FT L1220xH54xW82.5mm	40W	CREE				2600 – 3200 lm			>90		
WL-3COV1FT10WAD1UV-80-XXXX(XXK)-C	1FT L305xH54xW82.5mm	10W	CREE			80 – 100 lm/W	800-1000 lm			>80		
WL-3COV4FT40WAD1UV-80-XXXX(XXK)-C	4FT L1220xH54xW82.5mm	40W	CREE				3200-4000 lm			>80		
WL-3COV1FT10WAD1UV-90-XXXX(XXK)-L	1FT L305xH54xW82.5mm	10W	LUMISEE			65 – 80 lm/W	650 – 800 lm			>90	≤16	≤3
WL-3COV4FT40WAD1UV-90-XXXX(XXK)-L	4FT L1220xH54xW82.5mm	40W	LUMISEE				2600 – 3200 lm			>90		
WL-3COV1FT10WAD1UV-80-XXXX(XXK)-L	1FT L305xH54xW82.5mm	10W	LUMISEE			80 – 100 lm/W	800-1000 lm			>80		
WL-3COV4FT40WAD1UV-80-XXXX(XXK)-L	4FT L1220xH54xW82.5mm	40W	LUMISEE				3200-4000 lm			>80		
WL-3COV1FT10WMUV-90-XXXX(RGBW)-R	1FT L305xH54xW82.5mm	10W	CERAMI C3535	15°x15°,24°x24° 36°x36°,60°x60° 15×40°,15×55° etc Optic	RGBW	60 lm/W	600 lm	DC24V	DMX512	Red:620-630nm Green:520-535nm Blue:450-475nm White:380-780nm	/	/
WL-3COV4FT40WMUV-90-XXXX(RGBW)-R	4FT L1220xH54xW82.5mm	40W	CERAMI C3535		RGBW	60 lm/W	2400 lm		DMX512			

