Cove

Cleaver G5 Cove Light

Interior G5 cove light

Project	
Type	
Date	



The CLEAVER G5 is designed for commercial spaces that demand clean, uniform, low-glare illumination — from office interiors to retail environments.

Lumen output	550 to 4,800 lm
Colour temperature	3000K / 3500K / 4000K, single CCT
Wattage	5 to 40 W
Sizes	1FT, 4FT
Efficacy	120 lm/W, 110 lm/W
Voltage	120-277V
Dimming	0-10V(5%-100%) / TRIAC
CRI	>90 / >80
UGR	<28

ETL | 5-year warranty

Ordering information

Model	Dimension	Watt Select	Beam Angle	Efficacy	Lumens	CCT Select	Voltage	Dimmable	CRI	UGR
WL-5COV1FT10WB2DUV-90-110-YY(XXK-XXK-XXK)	1FT	5W/7.5W/10W	110°	120 lm/W	600-1200 lm	30K/35K/40K	120-277V	0-10V(5%-100%) / TRIAC	>90 / >80	<28
WL-5COV4FT40WB2DUV-90-110-YY(XXK-XXK-XXK)	4FT	20W/30W/40W	110°	120 lm/W	2400-4800 lm	30K/35K/40K	120-277V	0-10V(5%-100%) / TRIAC	>90 / >80	<28
WL-5COV1FT10WB2DUV-90-VVV-YY(XXK-XXK-XXK)	1FT	5W/7.5W/10W	25°/35°/45°/60°40×45°/45×60°	110 lm/W	550-1100 lm	30K/35K/40K	120-277V	0-10V(5%-100%) / TRIAC	>90 / >80	<28
WL-5COV4FT40WB2DUV-90-VVV-YY(XXK-XXK-XXK)	4FT	20W/30W/40W	25°/35°/45°/60°40×45°/45×60°	110 lm/W	2200-4400 lm	30K/35K/40K	120-277V	0-10V(5%-100%) / TRIAC	>90 / >80	<28

CLEAVER G5



CLEAVER G5

Interior G5 Cove Light

Specifications

Lumen Output
550 - 4,800 Lumens

Single CCT
3000K/3500K/4000K CCT


Single Wattage
5 - 40 Watts

Intertek


5 YEAR WARRANTY



Linkable




Beam Angles

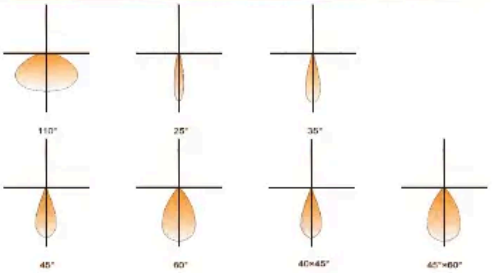

Mounting



Surface Mount



+/- 40 degrees adjustable angle. Adjust to 30 degrees for the highest point

Model	Dimension	Watt select	Max Lumen	Nominal Efficacy	CCT	Beam Angle	Voltage	Dimming	CRI	UGR
WL-5COV1FT10WB2DUV-90-110-YY(XXK-XXK-XXK)	1FT L306×W69xH46.2mm	5W/7.5W/10W	1200lm	120lm/W	3000K 3500K 4000K Select	110°	AC120-277V	0-10V (5-100%)	Ra>90 (80 Optional)	<28
WL-5COV4FT40WB2DUV-90-110-YY(XXK-XXK-XXK)	4FT L1206×W69×H46.2mm	20W/30W/40W	4800lm							
WL-5COV1FT10WB2DUV-90-VVV-YY(XXK-XXK-XXK)	1FT L306×W69xH46.2mm	5W/7.5W/10W	1100lm	110lm/W		25°/35°/45°/60° 40×45°/45×60°				<19
WL-5COV4FT40WB2DUV-90-VVV-YY(XXK-XXK-XXK)	4FT L1206×W69×H46.2mm	20W/30W/40W	4400lm							
WL-5COV1FT10WB2TRSV-90-110(XXK-XXK-XXK)	1FT L306×W69xH46.2mm	5W/7.5W/10W	1200lm	120lm/W		110°	AC120V	Triac	Ra>90 (80 Optional)	<28
WL-5COV4FT40WB2TRSV-90-110-YY(XXK-XXK-XXK)	4FT L1206×W69×H46.2mm	20W/30W/40W	4800lm							
WL-5COV1FT10WB2TRSV-90-VVV-YY(XXK-XXK-XXK)	1FT L306×W69xH46.2mm	5W/7.5W/10W	1100lm	110lm/W		25°/35°/45°/60° 40×45°/45×60°				<19
WL-5COV4FT40WB2TRSV-90-VVV-YY(XXK-XXK-XXK)	4FT L1206×W69×H46.2mm	20W/30W/40W	4400lm							