Cylinders and downlights

Verse G1 Architectural Cylinder

Architectural modular cylinder

Project	
Type	
Date	

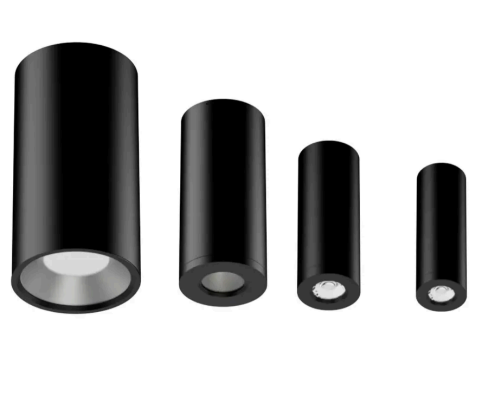

VERSE is a high-end, modular architectural cylinder luminaire designed for flexibility and performance. Available in pendant and surface mounting, it features 5 CCT selections, 3 wattage options, and interchangeable trims, reflectors, and lenses to suit a wide range of lighting needs.

Lumen output	900 to 9,000 lm
Colour temperature	2700K / 3000K / 3500K / 4000K / 5000K, selectable
Wattage	9 to 90 W
Sizes	3"- H:6.5"(165mm), 4" (Type B) - H: 8" (203mm), 4" (Type B)- H:11" (280mm), 6" (Type A)- H:5.88" (149.5mm), 6" (Type B)- H:13.2" (335mm), 8"-H:17" (433.5mm)
Efficacy	100lm/W, 90lm/W, 110lm/W
Dimming	0-10V&Triac
CRI	>90, >80

ETL | 5-year warranty | Damp location

Ordering information

Model	Aperture Size	Watt select	Lumens	Optical	Distribution	Efficacy	CCT select	Dimming	CRI
WL-1CLD3IN15WB5D3UV5A	3"- H:6.5"(165mm)	9/12/15W	900/1200/1500lm	Lens	20°30°40°50°	100lm/W	27K/30K/35K/40K/50K	0-10V&Triac	>90
WL-1CLD4IN30WB5D3UV5A	4" (Type B) - H: 8" (203mm)	18/24/30W	1800/2400/3000lm	Lens	20°30°40°50°	100lm/W	27K/30K/35K/40K/50K	0-10V&Triac	>90
WL-1CLD4IN40WB5D3UV5A	4" (Type B)- H:11" (280mm)	20/30/40W	2000/3000/4000lm	Lens	20°30°40°50°	100lm/W	27K/30K/35K/40K/50K	0-10V&Triac	>90
WL-1CLD6IN20WB5D3UV5A	6" (Type A)- H:5.88" (149.5mm)	10/15/20W	900/1350/1800lm	Reflector	25°36°60°	90lm/W	27K/30K/35K/40K/50K	0-10V&Triac	>90
WL-1CLD6IN55WB5D3UV5A	6" (Type B)- H:13.2" (335mm)	45/50/55W	4950/5500/6050lm	Reflector	25°36°60°	110lm/W	27K/30K/35K/40K/50K	0-10V&Triac	>80
WL-1CLD6IN55WB5D3UV5A	6" (Type B)- H:13.2" (335mm)	45/50/55W	4950/5500/6050lm	Reflector	25°36°60°	90lm/W	27K/30K/35K/40K/50K	0-10V&Triac	>90
WL-1CLD8IN90WAD3UVXX	8"-H:17"(433.5mm)	90W	9000lm	Reflector	25°36°60°	100lm/W	27K/30K/35K/40K/50K single CCT	0-10V&Triac	>80
WL-1CLD8IN90WAD3UVXX	8"-H:17"(433.5mm)	90W	8100lm	Reflector	25°36°60°	90lm/W	27K/30K/35K/40K/50K single CCT	0-10V&Triac	>90

CYLINDER G1



CYLINDER G1

Architectural Modular Cylinder

Specifications

Switch Select
900 - 9,000 Lumens

CCT Select
2700K/3000K/3500K/ 4000K/5000K CCT

Wattage Select
9 - 90 Watts

Intertek

5 YEAR WARRANTY

DAMP LOCATION

Interchangeable parts, different heights



Interchangeable Cone (Twist Lock)



Twist Lock Optic Lens (Easy change)



Aluminum reflector



Mounting

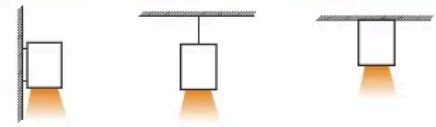

Model	Dimension	Watt select	Lumens	Optical	Distribution	Efficacy	CCT	Voltage	Dimmable	CRI
WL-1CLD3IN15WB5D 1UV5A -90-VV-MM-YY-SS-ZZ	3" (Ø2.87 x 7.09")	9W/12W/15W	900lm 1200lm 1500lm	Lens	20° 30° 40° 50	100 lm /W	2700K 3000K 3500K 4000K 5000K Select	AC120-277V	0-10V (5%-100%, cannot turn off)	>90
WL-1CLD3IN15WB5 TRSV5A -90-VV-MM-YY-SS-ZZ	3" (Ø2.87 x 7.09")	9W/12W/15W	900lm 1200lm 1500lm					AC120V	Triac /ELV	
WL-1CLD4IN30WB5D3UV5A -90-VV-MM-YY-SS-ZZ	4"(Type A) (Ø4.72 x 8.78")	18W/24W/30W	1800lm 2400lm 3000lm					AC120-277V	0-10V (5%-100%, cannot turn off) & Triac (10 %-100%)	
WL-1CLD4IN40WB5D3UV5A -90-VV-MM-YY-SS-ZZ	4"(Type B) (Ø4.72 x 11.81")	20W/30W/40W	2000lm 3000lm 4000lm							
WL-1CLD6IN20WB5D3UV5A -90-VV-MM-YY-SS-ZZ	6"(Type A) (Ø5.55 x 6.47")	10W/15W/20W	900lm 1350lm 1800lm	Reflector	15° 25° 60°	90 lm/W				>90
WL-1CLD6IN 40WB5D3UV5A -90-VV-MM-YY-SS-ZZ	6"(Type B) (Ø5.55 x 10.63 ")	20W/30W/40W	1800lm 2700lm 3600lm	Reflector		90 lm/W				>90
WL-1CLD6IN55WB5D3UV5A -80-VV-MM-YY-SS-ZZ	6"(Type C) (Ø5.55 x 13.79 ")	45W/50W/55W	4950lm 5500lm 6050lm	Reflector		110 lm/W				>80
WL-1CLD6IN 55WB5D3UV5A -90-VV-MM-YY-SS-ZZ	6"(Type C) (Ø5.55 x 13.79 ")	45W/50W/55W	4050 lm 4500 lm 4950 lm	Reflector		90 lm /W				>90
WL-1CLD8IN90WB3D3UVXX -80-VV-MM-SS-YY	8" (Ø7.87 x 17.22 ")	70W/80W/90W	7000 lm 8000 lm 9000 lm	Reflector		100 lm /W	2700K/ 3000K/ 3500K/ 4000K/ 5000K/ Single			>80
WL-1CLD8IN90WB3D3UVXX -90-VV-MM-SS-YY	8" (Ø7.87 x 17.22 ")	70W/80W/90W	6300lm 7200lm 8100 lm	Reflector		90 lm /W				>90