
Linear, direct

Dense 177

MS series linear light

Project	
Type	
Date	

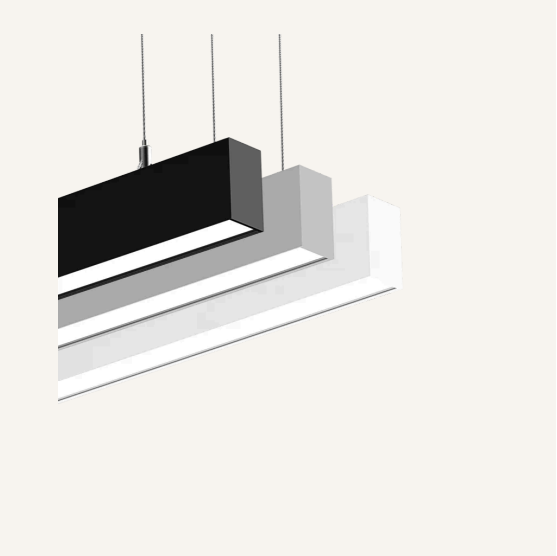

The Dense series epitomizes minimalist elegance, offering sleek, consistent lines of light that complement any architectural setting.

Lumen output	2,000 to 10,000 lm
Colour temperature	3000K / 3500K / 4000K, selectable
Wattage	20 to 100 W
Sizes	2FT(576mm), 4FT(1146mm), 6FT(1716mm), 8FT(2286mm)
Efficacy	100lm/W
Voltage	120-347V
Dimming	0-10V(1-100%)
CRI	>90

ETL | 5-year warranty

Ordering information


Model	Length / pattern	Wattage	Efficacy	Lumens	CCT Select	Voltage	Dimming	CRI
WL -MSD2FT20WBDHV	2FT(576mm)	20W	100lm/W	2000lm	30K/35K/40K	120-347V	0-10V(1-100%)	>90
WL-MSD4FT40WBDHV	4FT(1146mm)	40W	100lm/W	4000lm	30K/35K/40K	120-347V	0-10V(1-100%)	>90
WL-MSD6FT60WBDHV	6FT(1716mm)	60W	100lm/W	6000lm	30K/35K/40K	120-347V	0-10V(1-100%)	>90
WL-MSD8FT80WBDHV	8FT(2286mm)	80W	100lm/W	8000lm	30K/35K/40K	120-347V	0-10V(1-100%)	>90
WL-MSDL20WBDHV	L Pattern	20W	100lm/W	2000lm	30K/35K/40K	120-347V	0-10V(1-100%)	>90
WL-MSDT30WBDHV	T Pattern	30W	100lm/W	3000lm	30K/35K/40K	120-347V	0-10V(1-100%)	>90
WL-MSDC40WBDHV	X Pattern	40W	100lm/W	4000lm	30K/35K/40K	120-347V	0-10V(1-100%)	>90

DENSE | SENSE 177





Linkable



DENSE | SENSE 177

MS series Linear Light

Specifications

Switch Select
2,000 - 10,000 Lumens

CCT Select
3000K/3500K/4000K CCT

Single Wattage
20 - 100 Watts

Intertek


5 YEAR WARRANTY

Linkable Pattern



L - Shape T - Shape X - Shape


Features

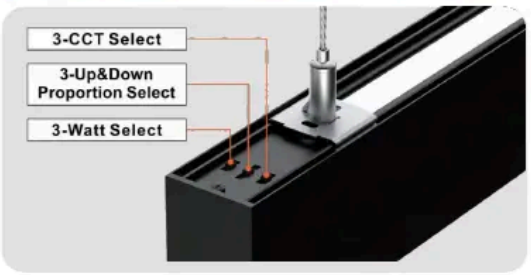

Mounting




Wall Mount Pendant Mount Surface Mount Recessed



Wall Mount Pendant Mount

14



Modular Upper Light, easier Maintenance



Down:20W
Up&Down: 30W



Down: 30W
Up&Down: 40W



Down:40W
Up&Down: 50W

Sense 177	Length/ Pattern	Wattage	Max Output Lumen Up 30% Down 70%	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-MSUD2FT25WBDHV	2'	25W	2500lm	100lm/W	3000K 3500K 4000K	AC120-347V	1%-100%	>90
WL-MSUD4FT50WBDHV	4'	50W	5000lm					
WL-MSUD6FT75WBDHV	6'	75W	7500lm					
WL-MSUD8FT100WBDHV	8'	100W	10000lm					
WL-MSUDL30WBDHV	L Pattern	30W	3000lm					
WL-MSUDT40WBDHV	T Pattern	40W	4000lm					
WL-MSUDC50WBDHV	X Pattern	50W	5000lm					

Dense 177	Length/ Pattern	Wattage	Max Output Lumen Up 0% Down 100%	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL -MSD2FT20WBDHV	2'	20W	2000lm	100lm/W	3000K 3500K 4000K	AC120-347V	1%-100%	>90
WL -MSD4FT40WBDHV	4'	40W	4000lm					
WL -MSD6FT60WBDHV	6'	60W	6000lm					
WL -MSD8FT80WBDHV	8'	80W	8000lm					
WL -MSDL20WBDHV	L Pattern	20W	2000lm					
WL -MSDT30WBDHV	T Pattern	30W	3000lm					
WL -MSDC40WBDHV	X Pattern	40W	4000lm					

DENSE | SENSE 177



DENSE | SENSE 177

MS series Linear Light (Optics)

Specifications

Lumen Output
2,880 - 8,640 Lumens


Single CCT
3000K/3500K/4000K CCT

Single Wattage
24 - 72 Watts


Intertek

5 YEAR WARRANTY

Mounting

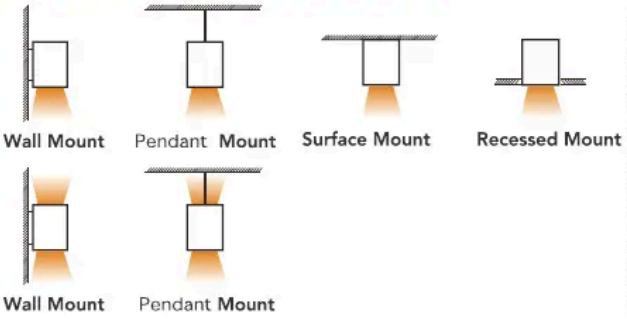

Beam Angles

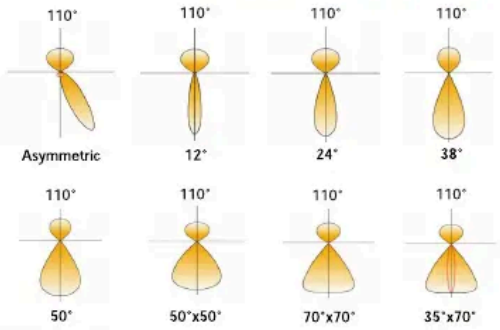

Sense 177	Length	Wattage	Max Output Lumen Up 30% Down 70%	Nominal Efficacy	Single CCT	Input Voltage	Dimmable	CRI
WL-MSUD4FT54WADHV	4'	54W	5670lm	105lm/W	3000K 3500K 4000K	AC120-347V	0-10V	>90

Dense 177	Length	Wattage	Max Output Lumen Up 0% Down 100%	Nominal Efficacy	Single CCT	Input Voltage	Dimmable	CRI
WL-MSD4FT24WADHV	4'	24W	2880lm	120lm/W	3000K 3500K 4000K	AC120-347V	0-10V	>90
WL-MSD4FT36WADHV	4'	36W	4320lm					
WL-MSD8FT72WADHV	8'	72W	8640lm					

16