Linear, direct, GEN 13

Dense 178

GEN 13 low-glare linear light

Project	
Type	
Date	



The Dense 178 series embodies minimalist design, delivering clean, uniform lines of light for any architectural space. With advanced linear LED technology, it offers industry-leading efficacy and customization, including aperture, continuous runs, and unlimited lengths.

Lumen output	8,500 to 20,667 lm
Colour temperature	3000K / 3500K / 4000K, selectable
Wattage	30 to 120 W
Sizes	4FT, 8FT
Efficacy	170lm/w
Voltage	220-240V
Dimming	0-10V (1%-100%)
CRI	>80

ETL | 5-year warranty | UGR<19 | 170 lm/W

Ordering information

Model	Length	Wattage Select	Efficacy	Lumen	CCT Select	Voltage	Dimmable	CRI
WL-13LSD4FT50WB1D1HV	4FT	30/40/50W	170lm/w	5100lm/6800lm/8500lm	30K/35K/40K	220-240V	0-10V (1%-100%)	>80
WL-13LSD8FT100WB1D1HV	8FT	60/80/100W	170lm/w	10200lm/13600lm/17000lm	30K/35K/40K	220-240V	0-10V (1%-100%)	>80

DENSE | SENSE 178



DENSE | SENSE 178

Low Glare GEN13 Linear Light

Specifications

Switch Select
8,500 - 20,667 Lumens

CCT Select
3000K/3500K/4000K CCT


Wattage Select
30 - 120 Watts

Intertek


5 YEAR WARRANTY

UGR<19

Selectable Distribution




Mounting




Pendant **Mount**

Beam Angles

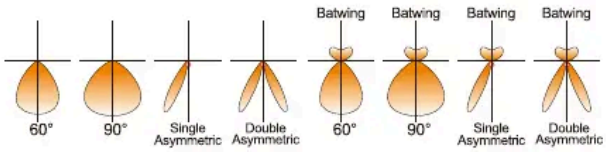

Features

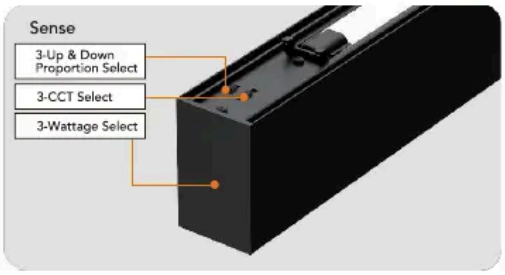

Sense 178	Length	Wattage Select	Max Output Lumen			Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
			Up 10% Down 90%	Up 20% Down 80%	Up 30% Down 70%					
WL-13LSUD4FT50WE1D1UV	4'	36W/48W/60W	10200lm	10284lm	10334lm	170lm/W	3000K 3500K 4000K	AC120-347V	0-10V (1%-100%)	>80
WL-13LSUD8FT120WE1D1UV	8'	72W/96W/120W	20400lm	20567lm	20667lm					

Dense 178	Length	WattageSelect	Max Output Lumen	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
			Up 0%Down 100%					
WL-13LSD4FT50WB1D1UV	4'	30W/40W/50W	8500lm	170lm/W	3000K 3500K 4000K	AC120-347V	0-10V (1%-100%)	>80
WL-13LSD8FT100WB1D1UV	8'	60W/80W/100W	17000lm					