Linear, direct, GEN 3

Dense 197

GEN 3 economy linear light

Project	
Type	
Date	



The Dense E 197 embodies a minimalist and elegant design, featuring smooth and consistent lines of light that enhance any commercial environment. Utilizing advanced linear LED technology, the Dense E 197 excels in efficiency and provides complete customization options.


Lumen output	4,800 to 11,500 lm
Colour temperature	3000K / 4000K / 5000K, selectable
Wattage	40 to 100 W
Sizes	4FT(1130mm), 8FT(2400mm)
Efficacy	120lm/W
Voltage	120-277V
Dimming	0-10V
CRI	>80

ETL | 5-year warranty

Ordering information

Model	Length / pattern	Wattage	Efficacy	Lumen	CCT Select	Voltage	Dimming	CRI
WL-3LSD4FT40WBDUV(30K-40K-50K-T)	4FT(1130mm)	40W	120lm/W	4800lm	30K/40K/50K	120-277V	0-10V	>80
WL-3LSD8FT80WBDUV(30K-40K-50K-T)	8FT(2400mm)	80W	120lm/W	9600lm	30K/40K/50K	120-277V	0-10V	>80

DENSE | SENSE 197E

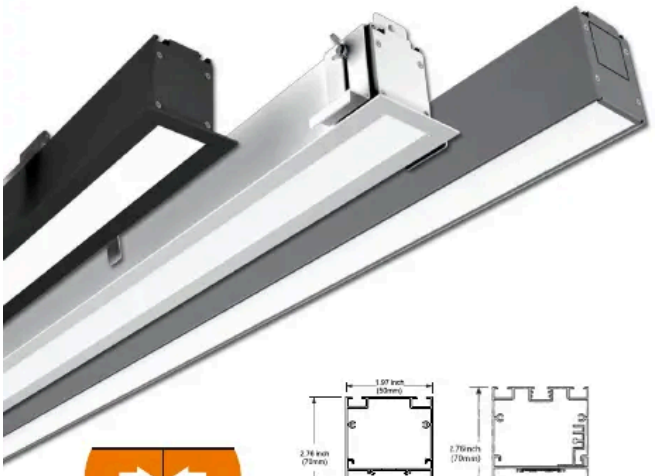

Linkable

DENSE | SENSE 197E

Economy GEN3 Linear Light

Specifications

Lumen Output
4,800 - 11,500 Lumens


CCT Select
3000K/4000K/5000K CCT

Single Wattage
40 - 100 Watts

Intertek

5 YEAR WARRANTY

Beam Angles




Mounting



Pendant **Mount** Pendant **Mount** Recessed **Mount**

Features

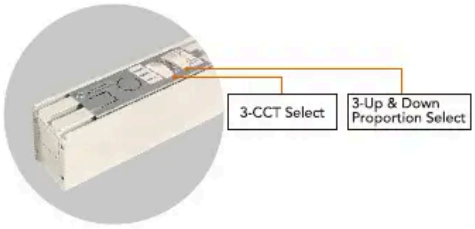

Sense E 197	Length	Wattage	Max Output Lumen Up 30% Down 70%	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-3LSUD4FT50W	4'	50W	5750lm	115lm/W	3000K 4000K 5000K	AC120-277V	Non-Dimming 0-10V DALI	>80
WL-3LSUD8FT100W	8'	100W	11500lm					

Dense E 197	Length	Wattage	Max Output Lumen Up 0% Down 100%	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-3LSD4FT40W	4'	40W	4800lm	120lm/W	3000K 4000K 5000K	AC120-277V	Non-Dimming 0-10V DALI	>80
WL-3LSD8FT80W	8'	80W	9600lm					