
Linear, direct

Dense 275 Perimeter

Recessed outside-corner perimeter light

Project	
Type	
Date	

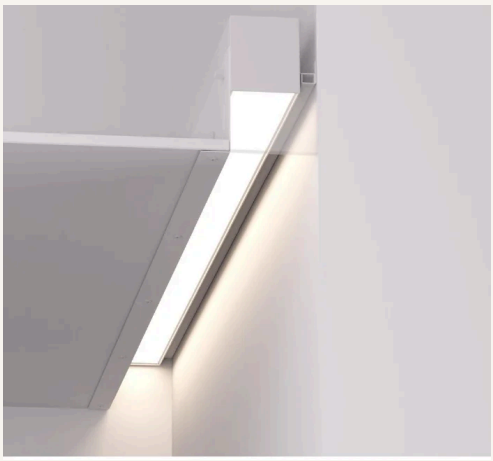


Dense 275 Perimeter is the recessed outside-corner version of Dense 275. It runs a continuous line of light around the edge of a ceiling, with width and height adjustable on site and wattage and CCT selectable inside the fixture.

Lumen output	1,250 to 10,000 lm
Colour temperature	3000K / 3500K / 4000K, selectable
Wattage	10 to 80 W

ETL | 5-year warranty

DENSE 275 - Perimeter

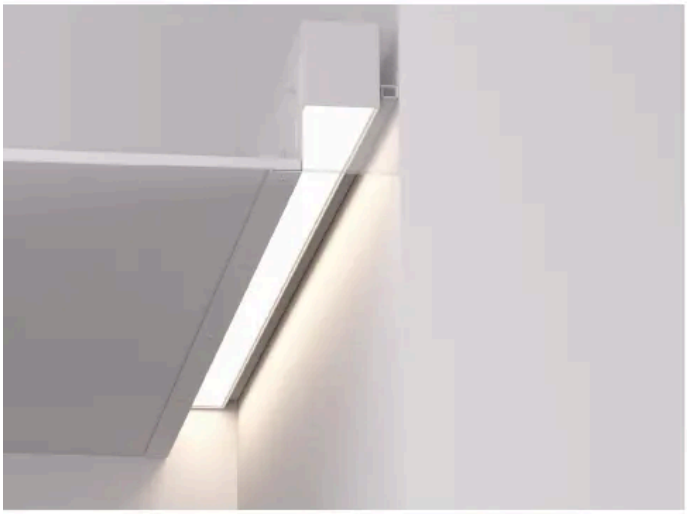

DENSE 275 - Perimeter

Recessed Outside Corner

Specifications

Switch Select
1,250 - 10,000 Lumens


CCT Select
3000K/3500K/4000K CCT

Wattage Select
10 - 80 Watts

Intertek


5 YEAR WARRANTY

Linkable




Width adjustable horizontally


Height adjustable up and down

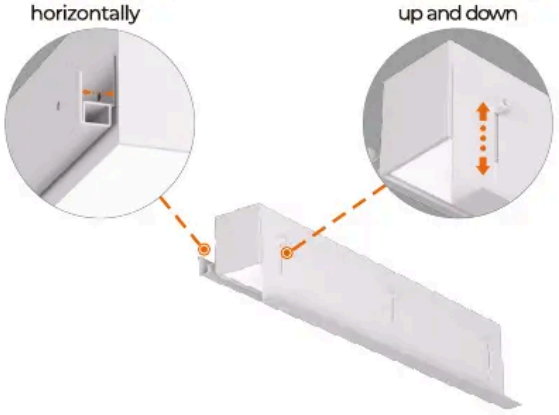

Features

Internal watt & CCT selectable

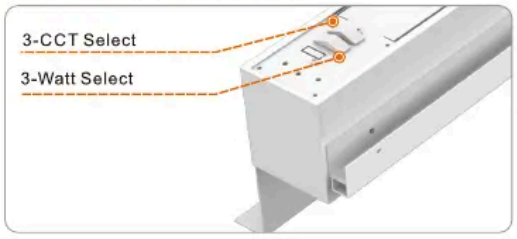

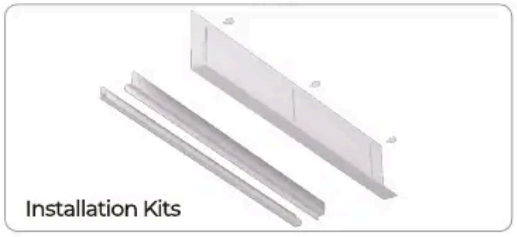

DENSE 275 PERIMETER	Length	LED	Wattage Select	Luminous Flux	Nominal Efficacy	CCT Select	Input Voltage	Dimming	CRI
WL-2LSD2FT2 0WBDHV (XXK-XXK-XXK)-T-YY-ZZ	2'	RUNLUX / LUMILEDS	10 / 15 / 20W	1250/1875 /2500 lm	125 lm/W (140 lm/W optional)	3-Select CCT: 3000K/ 3500K/ 4000K	AC120-347V	0-10V (1-100%) / Tunable White / Dim to Warm	Ra>80
WL-2LSD4FT 40WBDHV (XXK-XXK-XXK)-T-YY-ZZ	4'	RUNLUX / LUMILEDS	20 / 30 / 40W	2500/3750/5000 lm					
WL-2LSD8FT 80WBDHV (XXK-XXK-XXK)-T -YY-ZZ	8'	RUNLUX / LUMILEDS	40 / 60 / 80W	5000/7500/10000 lm					