Linear, direct, GEN 22

# Dense 276

GEN 22 IP66 linear light

| | |
|---|---|
| Project | |
| Type | |
| Date | |



The Dense 276, an IP65-rated linear luminaire, is an ideal choice for long-term professional lighting applications in wet locations.


| | |
|---|---|
| Lumen output | 1,050 to 14,700 lm |
| Colour temperature | 3000K / 3500K / 4000K, selectable |
| Wattage | 10 to 140 W |
| Sizes | 2FT, 4FT, 8FT |
| Efficacy | 105lm/w |
| Voltage | 120-277V |
| Dimming | 0-10V (1%-100%), 0-10V (10%-100%) |
| CRI | >80 |
| UGR | 28 |

ETL | 5-year warranty | IP66 | Wet location | IK10


# Ordering information

| Model | Length | Wattage Select | Efficacy | Lumen | CCT Select | Voltage | Dimmable | CRI | Flicker | UGR |
|---|---|---|---|---|---|---|---|---|---|---|
| WL-22LSD2FT20WB3D1UV | 2FT | 10W/15W/20W | 105lm/w | 1050lm/1575lm/2100lm | 30K/35K/40K or 30K/40K/50K | 120-277V | 0-10V (1%-100%) | >80 | <5% | 28 |
| WL-22LSD4FT40WB3D1UV | 4FT | 20W/30W/40W | 105lm/w | 2100lm/3150lm/4200lm | 30K/35K/40K or 30K/40K/50K | 120-277V | 0-10V (1%-100%) | >80 | <5% | 28 |
| WL-22LSD8FT80WB3D1UV | 8FT | 40W/60W/80W | 105lm/w | 4200lm/6300lm/8400lm | 30K/35K/40K or 30K/40K/50K | 120-277V | 0-10V (1%-100%) | >80 | <5% | 28 |
| WL-22LSD4FT70WADUV | 4FT | 70W | 105lm/w | 7350lm | 3000K-5000K Single CCT | 120-277V | 0-10V (10%-100%) | >80 | <5% | 28 |
| WL-22LSD8FT140WADUV | 8FT | 140W | 105lm/w | 14700lm | 3000K-5000K Single CCT | 120-277V | 0-10V (10%-100%) | >80 | <5% | 28 |

# DENSE 276

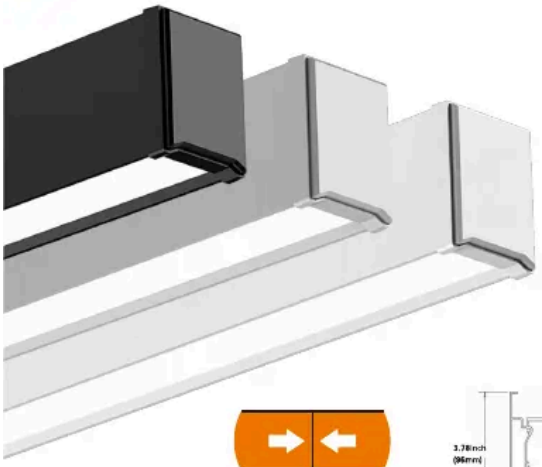

Linkable



## DENSE 276

### IP66 GEN22 Linear Light

## Specifications

Switch Select
1,050 - 14,700 Lumens

CCT Select
3000K/3500K/4000K CCT

Wattage Select
10 - 140 Watts

Intertek · 5 YEAR WARRANTY · IP66 · Wet location · IK10

## Available versions




Top Exit Wiring




Side Exit Route

## Mounting

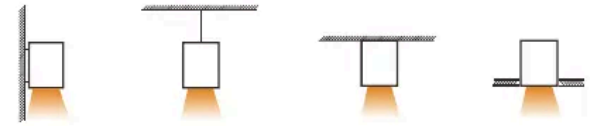

Wall Mount · Pendant Stem Mount · Surface Mount · Recessed Mount

## Features

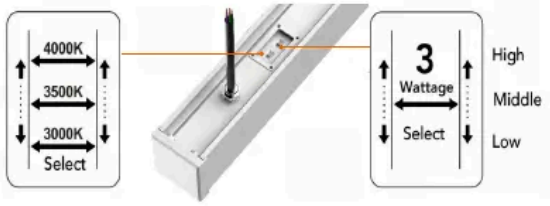


| Dense 276 | Length | Wattage Select | Lumen | Nominal Efficacy | CCT Select | Input Voltage | Dimmable | CRI | Flicker | UGR |
|---|---|---|---|---|---|---|---|---|---|---|
| WL-22LSD2FT20WB3D1UV (XXK-XXK-XXK)-YY | 2FT | 10W/15W/20W Select | 1050 lm<br>1575 lm<br>2100 lm | 105 lm/W | 3000K/3500K/4000K Select or 3000K/4000K/5000K Select | AC120-277V | 0-10V (1%-100%, dim to off) | >80 | <5% | 28 |
| WL-22LSD4FT40WB3D1UV (XXK-XXK-XXK)-YY | 4FT | 20W/30W/40W Select | 2100lm<br>3150lm<br>4200lm | 105 lm/W | | | | | | |
| WL-22LSD8FT80WB3D1UV (XXK-XXK-XXK)YY | 8FT | 40W/60W/80W Select | 4200lm<br>6300lm<br>8400lm | 105 lm/W | | | | | | |
| WL-22LSD8FT140WADUV(XXK)-YY | 8FT | 140W | 14700lm | 105 lm/W | 3000K-5000K Single CCT | | 0-10V (10%-100%) | | | |
| WL-22LSD4FT70WADUV(XXK)-YY | 4FT | 70W | 7350lm | 105 lm/W | | | | | | |