Linear, direct, GEN 8

Dense 375

GEN 8 3.75-inch linear light

Project	
Type	
Date	



The Dense 375 series defines minimalist sophistication, delivering clean, continuous lines of illumination across any architectural setting.

Lumen output	2,600 to 12,000 lm
Colour temperature	3000K / 3500K / 4000K, selectable
Wattage	20 to 100 W
Sizes	2FT(606mm), 4FT(1206mm), 8FT(2406mm)
Efficacy	120Lm/W
Voltage	AC120-277V
Dimming	0-10V(1%-100%)
CRI	>80

ETL | 5-year warranty


Ordering information

Model	Length	Wattage	Efficacy	Lumen	CCT Select	Voltage	Dimming	CRI
WL-8LSD2FT20WBD1HV(XXK-XXK-XXK)-YY-ZZ	2FT(606mm)	20W	120Lm/W	2400lm	30K/35K/40K	AC120-277V	0-10V(1%-100%)	>80
WL-8LSD4FT40WBD1HV(XXK-XXK-XXK)-YY-ZZ	4FT(1206mm)	40W	120Lm/W	4800lm	30K/35K/40K	AC120-277V	0-10V(1%-100%)	>80
WL-8LSD8FT80WBD1HV(XXK-XXK-XXK)-YY-ZZ	8FT(2406mm)	80W	120Lm/W	9600lm	30K/35K/40K	AC120-277V	0-10V(1%-100%)	>80

DENSE | SENSE 375



Linkable



DENSE | SENSE 375

3.75" GEN8 Linear Light

Specifications

Switch Select
2,600 - 12,000 Lumens

CCT Select
3000K/3500K/4000K CCT

Single Wattage
20 - 100 Watts

Intertek


5 YEAR WARRANTY

Linkable Pattern




L - Shape | T - Shape | X - Shape | Y - Shape | 120° Shape

Mounting

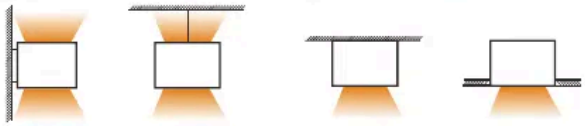


Wall Mount | Pendant Mount | Surface Mount | Recessed Mount



Wall Mount | Pendant Mount

Features

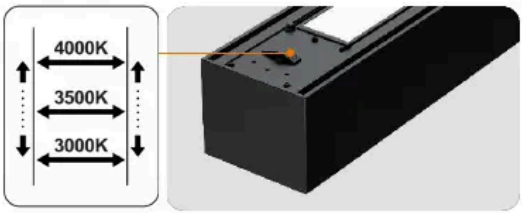

Sense 375	Length	Wattage	Max Output Lumen Up 30% Down 70%	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-8LSUD2FT25WBD1HV	2'	25W	3000lm	120lm/W	3000K 3500K 4000K	AC120-347V	(1%-100%) 0-10V	>80
WL-8LSUD4FT50WBD1HV	4'	50W	6000lm					
WL-8LSUD8FT100WBD1HV	8'	100W	12000lm					

Dense 375	Length	Wattage	Max Output Lumen Up 0% Down 100%	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-8LSD2FT20WBD1HV	2'	20W	2600lm	130lm/W	3000K 3500K 4000K	AC120-347V	(1%-100%) 0-10V	>80
WL-8LSD4FT40WBD1HV	4'	40W	5200lm					
WL-8LSD8FT80WBD1HV	8'	80W	10400lm					