
Linear, direct, GEN 7

Dense 567

Project	
Type	
Date	

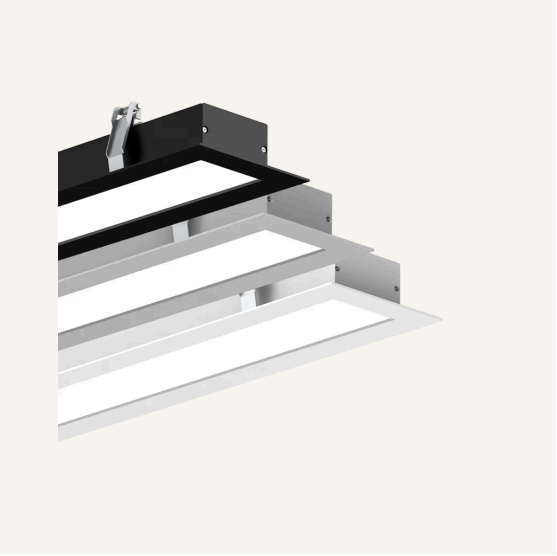

The Dense 567 series embodies a minimalist and elegant design, featuring smooth and consistent lines of light that enhance any commercial environment. Utilizing advanced linear LED technology, the Dense 567 series excels in efficiency and offers complete customization options.

Sizes	4FT(1136mm), 5FT(1491mm)
Efficacy	95Lm/W
Output	2,850 to 3,800 lm
Wattage	30 to 40 W
CCT	30K/40K/50K
Voltage	AC120-277V/220-240V
Dimming	Non-dimming/DALI
CRI	>80

Ordering information

Model	Length	Wattage	Efficacy	Lumens	CCT Select	Voltage	Dimming	CRI
WL-7LSD4FT30WATEV	4FT(1136mm)	30W	95Lm/W	2850lm	30K/40K/50K	AC120-277V/220-240V	Non-dimming/DALI	>80
WL-7LSD5FT40WATEV	5FT(1491mm)	40W	95Lm/W	3800lm	30K/40K/50K	AC120-277V/220-240V	Non-dimming/DALI	>80