WISDOM LIGHT


Specification sheet
November 2026

Linear, direct, GEN 24

Dense 287

GEN 24 eco linear light

Project	
Type	
Date	

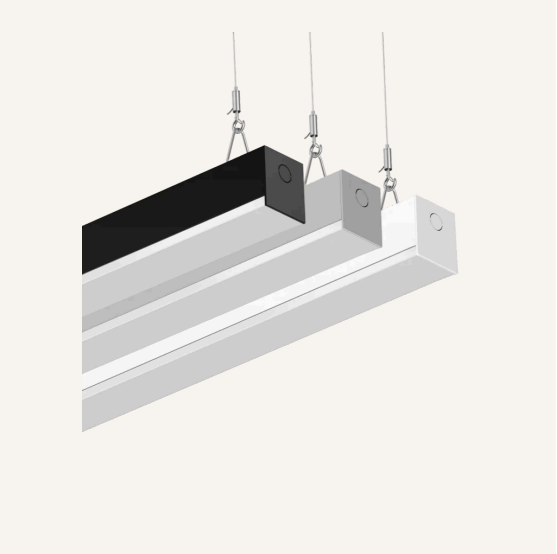

Defined by its signature Glo-Lens glow, seamless modular configurations, and simplified maintenance access, this linear system brings both performance and elegance to modern interiors.


Lumen output	2,800 to 12,000 lm
Colour temperature	3000K / 3500K / 4000K, selectable
Wattage	20 to 80 W
Sizes	2FT(605.6mm), 4FT(1205.6mm), 8FT(2405.6mm)
Efficacy	140 Lm/W
Voltage	120-347V
Dimming	0-10V(1%-100%)
CRI	>80

ETL | 5-year warranty

Ordering information

Model	Dimension	Watt Select	Efficacy	Lumens	CCT Select	Voltage	Dimmable	CRI
WL-24LSD2FT20WB1D1HV (30K-35K-40K)-YY-ZZ	2FT(605.6mm)	10W/15W/20W	140 Lm/W	1400/2100/2800 Lm	30K/35K/40K	120-347V	0-10V(1%-100%)	>80
WL-24LSD4FT40WB1D1HV (30K-35K-40K)-YY-ZZ	4FT(1205.6mm)	20W/30W/40W	140 Lm/W	2800/4200/5600 Lm	30K/35K/40K	120-347V	0-10V(1%-100%)	>80
WL-24LSD8FT80WB1D1HV (30K-35K-40K)-YY-ZZ	8FT(2405.6mm)	40W/60W/80W	140 Lm/W	5600/8400/11200Lm	30K/35K/40K	120-347V	0-10V(1%-100%)	>80

DENSE 287

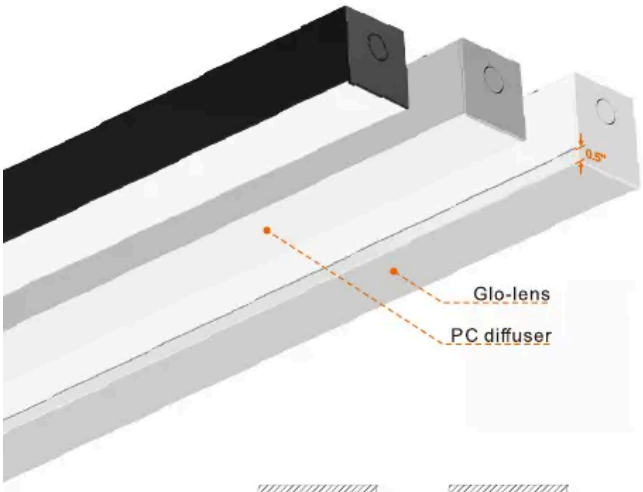

DENSE 287

Eco GEN24 Linear Light

Specifications

Switch Select
2,800 - 12,000 Lumens

CCT Select
3000K/3500K/4000K CCT


Wattage Select
20 - 80 Watts

Intertek

5 YEAR WARRANTY



Linkable




Mounting



Pendant Mount | Surface Mount | Recessed Mount


Beam Angles




120°

Features


PC Diffuser- snap on




Glo-lens -snap on



Easily removable from the bottom







Model	Length	Wattage	Output Lumen	Beam angle	Nominal Efficacy	CCT	Input Voltage	Dimmable	CRI
WL-24LSD4FT40WB3D1HV(30K-35K-40K)	4'	20W/30W/40W	600lm/900lm/1200lm	120°	140-150 lm/W	3000K 3500K 4000K	AC120-347V	0-10V (1%-100%)	>80
WL-24LSD8FT80WB3D1HV(30K-35K-40K)	8'	40W/60W/80W	2400lm/3600lm/4800lm						

32