Retrofit

Range Troffer Retrofit

Troffer retrofit kit, 2×2 ft and 2×4 ft

Project	
Type	
Date	



The Range Troffer Retrofit Kit is our newest LED lighting solution for customers looking to upgrade their fluorescent luminaires to a high performing aesthetically-pleasing LED system without the need to install a complete luminaire.


Lumen output	3,120 to 5,850 lm
Colour temperature	3000K / 4000K / 5000K, selectable
Wattage	24 to 45 W
Sizes	2'X2', 2'X4'
Efficacy	130Lm/W
Voltage	AC120-277V
Dimming	0-10V
CRI	>80

ETL | 5-year warranty

Ordering information

Model	Length	Wattage Select	Efficacy	Lumens	CCT Select	Voltage	Dimming	CRI	Flicker Index
WL-3TRRS2224/30/36DUV	2'X2'	24W/30W/36W	130Lm/W	3120lm/3900lm/4680lm	35K/40K/50K	AC120-277V	0-10V	>80	<30%
WL-3TRRS24/24/36/45DUV	2'X4'	24W/36W/45W	130Lm/W	3120lm/4680lm/5850lm	35K/40K/50K	AC120-277V	0-10V	>80	<30%

TROFFER RETROFIT

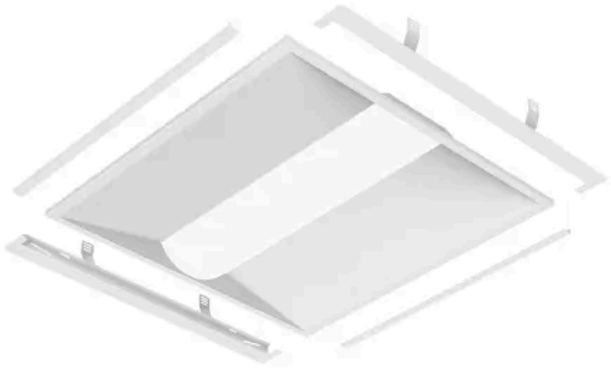

TROFFER RETROFIT

2X2FT, 2X4FT

Specifications

Switch Select

3,120 - 5,850 Lumens

CCT Select

3000K/4000K/5000K CCT

Wattage Select

24 - 45 Watts

Intertek

5 YEAR WARRANTY

Features





2x2FT 5112PCS 2x4FT 2606PCS

Retrofit Troffer	Length	Wattage Select	Output Lumen	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-3TRRS2224/30/36DUV	2'X2'	24W/30W/36W	3120lm/3900lm/4680lm	130lm/w	3500K 4000K 5000K	AC120-277V	0-10V	>80
WL-3TRRS24/24/36/45DUV	2'X4'	24W/36W/45W	3120lm/4680lm/5850lm					