Rings, drums and curves, GEN 26

Ring 256

GEN 26 architectural-grade hollow ring profile

Project	
Type	
Date	



Ring 256 is an architectural-grade hollow ring pendant in diameters from 18 to 72 inches. Rings hang singly or stacked in tiers on angled or vertical cables.

Lumen output	1,380 to 24,300 lm
Colour temperature	3000K / 3500K / 4000K, selectable
Wattage	12 to 180 W

ETL | 5-year warranty

RING 256



Ø18"/Ø24"/Ø36"/Ø48"/Ø60"/Ø72"

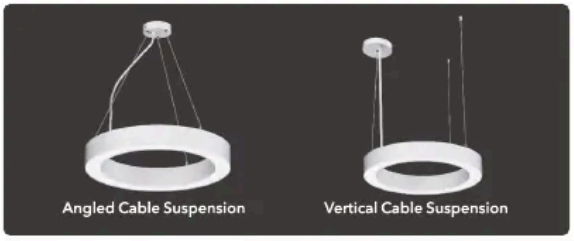

Mounting



Pendant Mount

RING 256

GEN26 Architectural-grade hollow ring profile

Specifications

Switch Select
1,380 - 24,300 Lumens

CCT Select
3000K/3500K/4000K CCT

Wattage Select
12 - 180 Watts

Intertek

5 YEAR WARRANTY

Features

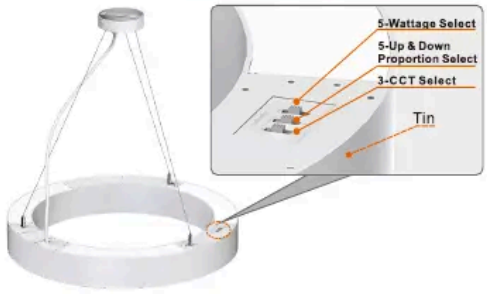

Model No.	Nominal Diameter	Wattage Select	Output Lumen	Nominal Efficacy	Up & Down Proportion	CCT Select	Input Voltage	Dimming	CRI
WL-26LSUD18IN35WE5D1HV (XXK-XXK-XXK)-YY-ZZ	18" (D456XW65XH82mm)	12/18/22/28/34W Select	1620-4590 lm (CRI80) 1380-3910 lm (CRI90)	135 lm/W(CRI80) 115 lm/W(CRI90)	50%+50% 70%+30% 30%+70% 10%+90% 0%+100% Select	3000K - 3500K - 4000K Select	120-347V	0-10V (1-100%)	>80
WL-26LSUD24IN60WE5D1HV (XXK-XXK-XXK)-YY-ZZ	24" (D600XW65XH82mm)	20/30/40/50/60W Select	2700-8100 lm	135 lm/W					
WL-26LSUD36IN90WE5D1HV (XXK-XXK-XXK)-YY-ZZ	36" (D900XW65XH82mm)	30/45/60/75/90W Select	4050-12150 lm	135 lm/W					
WL-26LSUD48IN120WE5D1HV (XXK-XXK-XXK)-YY-ZZ	48" (D1200XW65XH82mm)	40/60/80/100/120W Select	5400-16200lm	135 lm/W					
WL-26LSUD60IN150WE5D1HV (XXK-XXK-XXK)-YY-ZZ	60" (D1500XW65XH82mm)	50/75/100/125/150W Select	6750-20250lm	135 lm/W					
WL-26LSUD72IN180WE5D1HV (XXK-XXK-XXK)-YY-ZZ	72" (D1800XW65XH82mm)	60/90/120/150/180W Select	8100-24300lm	135 lm/W					