WISDOM LIGHT


Specification sheet
November 2026

Linear, direct/indirect

Sense 177

MS series linear light

Project	
Type	
Date	

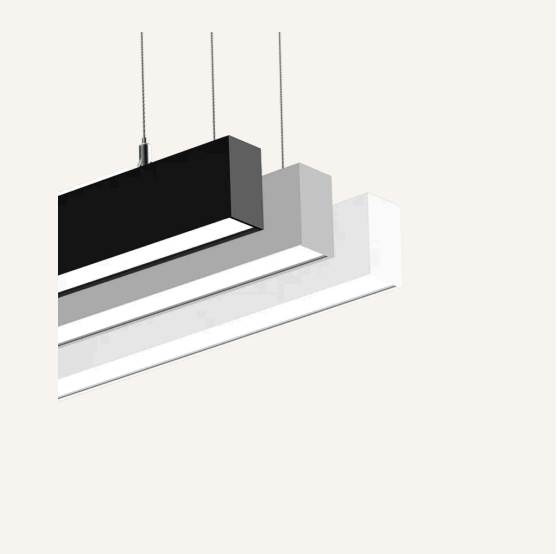

The Sense 177 product line embodies a deliberate low-glare control system. Its standout feature is the dual-level optical control, providing exceptional visual comfort through both indirect and direct lighting distributions, complete with a built-in programmer.

Lumen output	2,000 to 10,000 lm
Colour temperature	3000K / 3500K / 4000K, selectable
Wattage	20 to 100 W
Sizes	2FT(576mm), 4FT(1146mm), 6FT(1716mm), 8FT(2286mm)
Efficacy	100lm/W
Voltage	120-347V
Dimming	0-10V(1-100%)
CRI	>90

ETL | 5-year warranty

Ordering information


Model	Length / pattern	Wattage	Efficacy	Lumens	CCT Select	Voltage	Dimming	CRI
WL-MSUD2FT25WBDHV	2FT(576mm)	25W	100lm/W	2500lm	30K/35K/40K	120-347V	0-10V(1-100%)	>90
WL-MSUD4FT50WBDH	4FT(1146mm)	50W	100lm/W	5000lm	30K/35K/40K	120-347V	0-10V(1-100%)	>90
WL-MSUD6FT75WBDHV	6FT(1716mm)	75W	100lm/W	7500lm	30K/35K/40K	120-347V	0-10V(1-100%)	>90
WL-MSUD8FT100WBDHV	8FT(2286mm)	100W	100lm/W	10000lm	30K/35K/40K	120-347V	0-10V(1-100%)	>90
WL-MSUDL30WBDHV	L Pattern	30W	100lm/W	3000lm	30K/35K/40K	120-347V	0-10V(1-100%)	>90
WL-MSUDT40WBDHV	T Pattern	40W	100lm/W	4000lm	30K/35K/40K	120-347V	0-10V(1-100%)	>90
WL-MSUDC50WBDHV	X Pattern	50W	100lm/W	5000lm	30K/35K/40K	120-347V	0-10V(1-100%)	>90

DENSE | SENSE 177





Linkable



DENSE | SENSE 177

MS series Linear Light

Specifications

Switch Select
2,000 - 10,000 Lumens

CCT Select
3000K/3500K/4000K CCT

Single Wattage
20 - 100 Watts

Intertek


5 YEAR WARRANTY

Linkable Pattern



L - Shape T - Shape X - Shape


Features

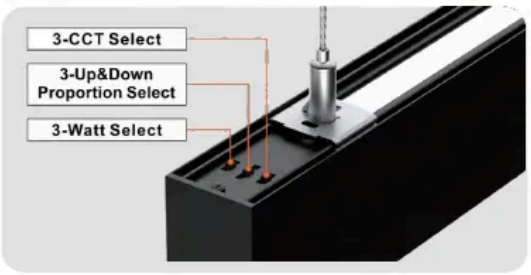

Mounting




Wall Mount Pendant Mount Surface Mount Recessed



Wall Mount Pendant Mount

14



Modular Upper Light, easier Maintenance



Down:20W
Up&Down: 30W



Down: 30W
Up&Down: 40W



Down:40W
Up&Down: 50W

Sense 177	Length/ Pattern	Wattage	Max Output Lumen	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
			Up 30% Down 70%					
WL-MSUD2FT25WBDHV	2'	25W	2500lm	100lm/W	3000K 3500K 4000K	AC120-347V	1%-100%	>90
WL-MSUD4FT50WBDHV	4'	50W	5000lm					
WL-MSUD6FT75WBDHV	6'	75W	7500lm					
WL-MSUD8FT100WBDHV	8'	100W	10000lm					
WL-MSUDL30WBDHV	L Pattern	30W	3000lm					
WL-MSUDT40WBDHV	T Pattern	40W	4000lm					
WL-MSUDC50WBDHV	X Pattern	50W	5000lm					

Dense 177	Length/ Pattern	Wattage	Max Output Lumen	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
			Up 0% Down 100%					
WL -MSD2FT20WBDHV	2'	20W	2000lm	100lm/W	3000K 3500K 4000K	AC120-347V	1%-100%	>90
WL -MSD4FT40WBDHV	4'	40W	4000lm					
WL -MSD6FT60WBDHV	6'	60W	6000lm					
WL -MSD8FT80WBDHV	8'	80W	8000lm					
WL -MSDL20WBDHV	L Pattern	20W	2000lm					
WL -MSDT30WBDHV	T Pattern	30W	3000lm					
WL -MSDC40WBDHV	X Pattern	40W	4000lm					

DENSE | SENSE 177



DENSE | SENSE 177

MS series Linear Light (Optics)

Specifications

Lumen Output
2,880 - 8,640 Lumens


Single CCT
3000K/3500K/4000K CCT

Single Wattage
24 - 72 Watts


Intertek

5 YEAR WARRANTY

Mounting

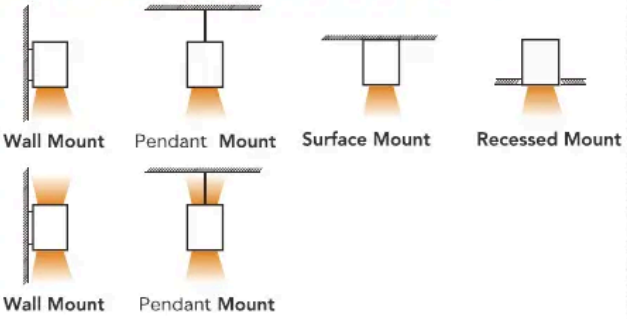

Beam Angles

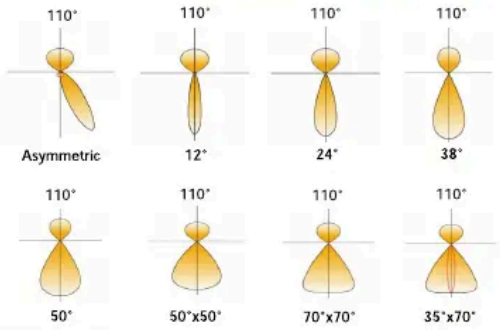

Sense 177	Length	Wattage	Max Output Lumen Up 30% Down 70%	Nominal Efficacy	Single CCT	Input Voltage	Dimmable	CRI
WL-MSUD4FT54WADHV	4'	54W	5670lm	105lm/W	3000K 3500K 4000K	AC120-347V	0-10V	>90

Dense 177	Length	Wattage	Max Output Lumen Up 0% Down 100%	Nominal Efficacy	Single CCT	Input Voltage	Dimmable	CRI
WL-MSD4FT24WADHV	4'	24W	2880lm	120lm/W	3000K 3500K 4000K	AC120-347V	0-10V	>90
WL-MSD4FT36WADHV	4'	36W	4320lm					
WL-MSD8FT72WADHV	8'	72W	8640lm					

16