WISDOM LIGHT

Specification sheet
November 2026

Linear, direct/indirect, GEN 13

Sense 178

GEN 13 low-glare linear light

Project	
Type	
Date	

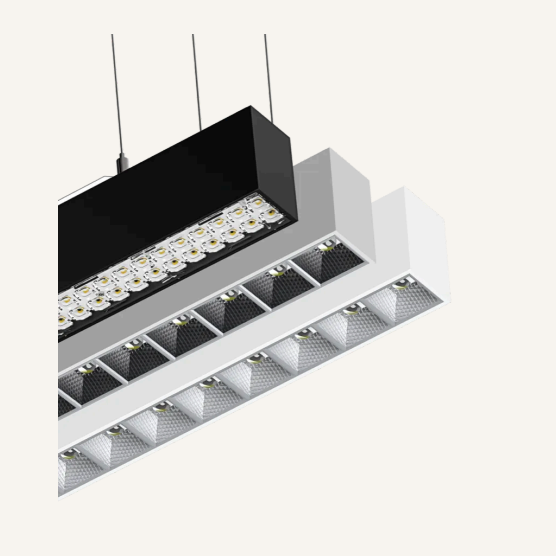

Designed for modern workspaces, hospitality, and architectural interiors, the Sense 178 series delivers refined illumination through a precision-engineered low-glare system. Its dual-level optical design blends indirect and direct light for balanced visual comfort, supported by a built-in programmer.

Lumen output	8,500 to 20,667 lm
Colour temperature	3000K / 3500K / 4000K, selectable
Wattage	30 to 120 W
Sizes	4FT, 8FT
Efficacy	170lm/w
Voltage	220-240V
Dimming	0-10V (1%-100%)
CRI	>80

ETL | 5-year warranty | UGR<19 | 170 lm/W

Ordering information

Model	Length	Wattage Select	Efficacy	Lumen	CCT Select	Voltage	Dimmable	CRI
WL-13LSUD4FT50WE1D1HV(XXK-XXK-XXK)-YY-ZZ	4FT	36/48/60W	170lm/w	6120lm/8160lm/10200lm	30K/35K/40K	220-240V	0-10V (1%-100%)	>80
WL-13LSUD8FT120WE1D1HV(XXK-XXK-XXK)-YY-ZZ	8FT	72/96/120W	170lm/w	12240lm/16320lm/20400lm	30K/35K/40K	220-240V	0-10V (1%-100%)	>80

DENSE | SENSE 178



Linkable



DENSE | SENSE 178

Low Glare GEN13 Linear Light

Specifications

Switch Select
8,500 - 20,667 Lumens

CCT Select
3000K/3500K/4000K CCT

Wattage Select
30 - 120 Watts

Intertek

5 YEAR WARRANTY

UGR<19

Selectable Distribution



Mounting



Pendant **Mount**

Beam Angles

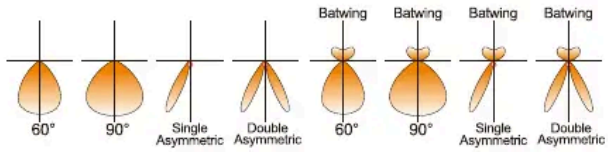

Features

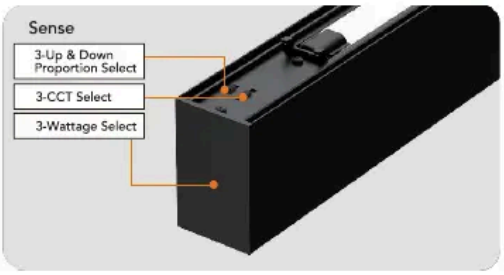

Sense 178	Length	Wattage Select	Max Output Lumen			Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
			Up 10% Down 90%	Up 20% Down 80%	Up 30% Down 70%					
WL-13LSUD4FT50WE1D1UV	4'	36W/48W/60W	10200lm	10284lm	10334lm	170lm/W	3000K 3500K 4000K	AC120-347V	0-10V (1%-100%)	>80
WL-13LSUD8FT120WE1D1UV	8'	72W/96W/120W	20400lm	20567lm	20667lm					

Dense 178	Length	WattageSelect	Max Output Lumen	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
			Up 0%Down 100%					
WL-13LSD4FT50WB1D1UV	4'	30W/40W/50W	8500lm	170lm/W	3000K 3500K 4000K	AC120-347V	0-10V (1%-100%)	>80
WL-13LSD8FT100WB1D1UV	8'	60W/80W/100W	17000lm					