Linear, direct/indirect, GEN 17

Sense 198

GEN 17 two-inch linear light

Project	
Type	
Date	



The Sense 178 product line embodies a deliberate, low-glare control system. Its standout feature is the dual-level optical control, providing exceptional visual comfort through both indirect and direct lighting distributions, complete with a built-in programmer.


Lumen output	1,050 to 10,500 lm
Colour temperature	3000K / 3500K / 4000K, selectable
Wattage	10 to 100 W
Sizes	2FT(606mm), 4FT(1206mm), 8FT(2406mm)
Efficacy	105lm/W
Voltage	120-277V
Dimming	0-10V (10%-100%)
CRI	＜19

ETL | 5-year warranty

Ordering information

Model	Length	Watt Select	Propotion Select	Efficacy	Lumens	CCT Select	Voltage	Dimmable	CRI
WL-17LSUD2FT25WE3DUV	2FT(606mm)	15W/20W/25W	↑30% / ↓70% or ↑50% / ↓50% or ↑0% / ↓100%	105lm/W	1575/2100/2625lm	30K/35K/40K	120-277V	0-10V (10%-100%)	＜19
WL-17LSUD4FT50WE3DUV	4FT(1206mm)	30W/40W/50W	↑30% / ↓70% or ↑50% / ↓50% or ↑0% / ↓100%	105lm/W	3150/4200/5250lm	30K/35K/40K	120-277V	0-10V (10%-100%)	＜19
WL-17LSUD8FT100WE3DUV	8FT(2406mm)	60W/80W/100W	↑30% / ↓70% or ↑50% / ↓50% or ↑0% / ↓100%	105lm/W	6300/8400/10500lm	30K/35K/40K	120-277V	0-10V (10%-100%)	＜19

DENSE | SENSE 198

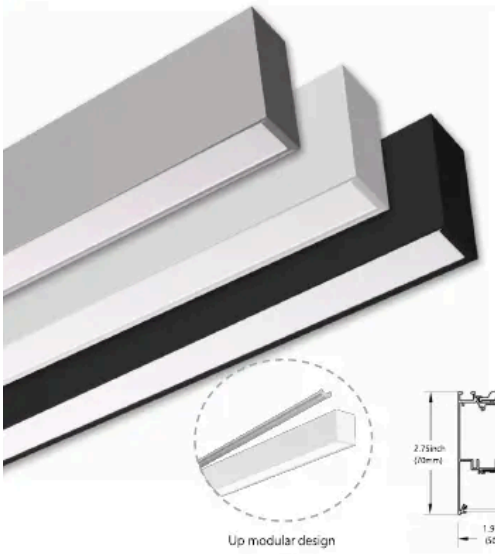

Linkable

DENSE | SENSE 198

2"GEN17 Linear Light

Specifications

Switch Select
1,050 - 10,500 Lumens


CCT Select
3000K/3500K/4000K CCT

Wattage Select
10 - 100 Watts

Intertek

5 YEAR WARRANTY

Mounting




Linkable Pattern



L - Shape T - Shape X - Shape

Features

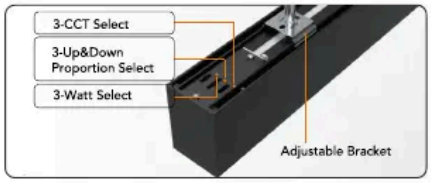

Sense 198	Length	Wattage Select	Output Lumen Up 30%Down 70%	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-17LSUD2FT25WE3DUV	2'	15W/20W/25W	1575lm/2100lm/2625lm	105lm/W	3000K 3500K 4000K	AC120-277V	0-10V(10%-100%)	>80
WL-17LSUD4FT50WE3DUV	4'	30W/40W/50W	3150lm/4200lm/5250lm					
WL-17LSUD8FT100WE3DUV	8'	60W/80W/100W	6300lm/8400lm/10500lm					

Dense 198	Length	Wattage Select	Output Lumen (White &3000K)	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-17LSD2FT20WB2DUV	2'	10W/15W/20W	1050lm/1575lm/2100lm	105lm/W	3000K 3500K 4000K	AC120-277V	0-10V(10%-100%)	>80
WL-17LSD4FT40WB2DUV	4'	20W/30W/40W	2100lm/3150lm/4200lm					
WL-17LSD8FT80WB2DUV	8'	40W/60W/80W	4200lm/6300lm/8400lm					