Linear, direct/indirect, GEN 8

Sense 375

GEN 8 3.75-inch linear light

Project	
Type	
Date	



The Sense 375 product line features a thoughtfully designed low-glare control system.

Lumen output	2,600 to 12,000 lm
Colour temperature	3000K / 3500K / 4000K, selectable
Wattage	20 to 100 W
Sizes	2FT(606mm), 4FT(1206mm), 8FT(2406mm)
Efficacy	120Lm/W
Voltage	AC120-277V
Dimming	0-10V(1%-100%)
CRI	>80


ETL | 5-year warranty

Ordering information

Model	Length	Wattage	Efficacy	Lumen	CCT Select	Voltage	Dimming	CRI
WL-8LSUD2FT25WBD1HV(XXK-XXK-XXK)-YY-ZZ	2FT(606mm)	25W	120Lm/W	3000lm	30K/35K/40K	AC120-277V	0-10V(1%-100%)	>80
WL-8LSUD4FT50WBD1HV(XXK-XXK-XXK)-YY-ZZ	4FT(1206mm)	50W	120Lm/W	6000lm	30K/35K/40K	AC120-277V	0-10V(1%-100%)	>80
WL-8LSUD8FT100WBD1HV(XXK-XXK-XXK)-YY-ZZ	8FT(2406mm)	100W	120Lm/W	12000lm	30K/35K/40K	AC120-277V	0-10V(1%-100%)	>80

DENSE | SENSE 375





DENSE | SENSE 375

3.75" GEN8 Linear Light

Specifications

Switch Select
2,600 - 12,000 Lumens

CCT Select
3000K/3500K/4000K CCT

Single Wattage
20 - 100 Watts


Intertek

5 YEAR WARRANTY


Linkable Pattern



Mounting

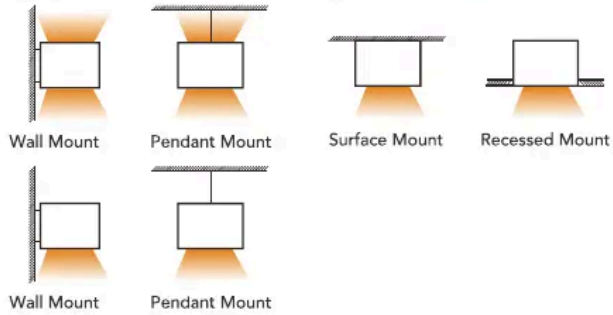

Features

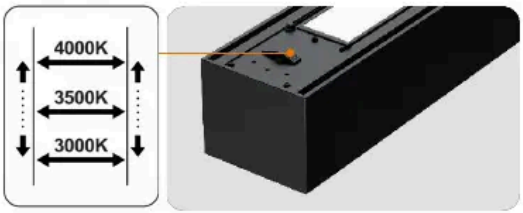

Sense 375	Length	Wattage	Max Output Lumen Up 30% Down 70%	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-8LSUD2FT25WBD1HV	2'	25W	3000lm	120lm/W	3000K 3500K 4000K	AC120-347V	(1%-100%) 0-10V	>80
WL-8LSUD4FT50WBD1HV	4'	50W	6000lm					
WL-8LSUD8FT100WBD1HV	8'	100W	12000lm					

Dense 375	Length	Wattage	Max Output Lumen Up 0% Down 100%	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-8LSD2FT20WBD1HV	2'	20W	2600lm	130lm/W	3000K 3500K 4000K	AC120-347V	(1%-100%) 0-10V	>80
WL-8LSD4FT40WBD1HV	4'	40W	5200lm					
WL-8LSD8FT80WBD1HV	8'	80W	10400lm					