WISDOM LIGHT

Specification sheet
November 2026

Linear, direct/indirect, GEN 12

Sense Blade 091 Pendant

GEN 12 wall-mount linear light

Project	
Type	
Date	



The Sense Blade 091 Series is an ultra-slim linear luminaire for pendant and wall-mount use. It features advanced LED optics with 120° uplight for ceiling uniformity and flush PMMA lenses (35×90°, 55×90°, 70×90°) or 110° PC diffuser for flexible downlight control.

Lumen output	1,500 to 3,000 lm
Colour temperature	3000K / 3500K / 4000K, selectable
Wattage	7.5 to 30 W
Sizes	2FT(606mm), 4FT(1206mm), 8FT(2406mm)
Efficacy	100lm/W, 100 lm/W
Voltage	120-347V
Dimming	0-10V (10%-100%)
CRI	>90

ETL | 5-year warranty

Ordering information

Model	Length	Wattage Select	Efficacy	Lumens	Beam Angle	CCT Select	Voltage	Dimming	CRI
WL-12LSUD2FT25WB2DHV	2FT(606mm)	15W/20W/25W	100lm/W	1500Lm/2000Lm/2500Lm	110°/35×90°/55×90°/70×90°	30K/35K/40K	120-347V	0-10V (10%-100%)	>90
WL-12LSUD4FT50WB2DHV	4FT(1206mm)	30W/40W/50W	100 lm/W	3000lm/4000lm/5000lm	110°/35×90°/55×90°/70×90°	30K/35K/40K	120-347V	0-10V (10%-100%)	>90
WL-12LSUD8FT50WB2DHV	8FT(2406mm)	60W/80W/100W	100 lm/W	6000lm/8000lm/10000lm	110°/35×90°/55×90°/70×90°	30K/35K/40K	120-347V	0-10V (10%-100%)	>90

SENSE BLADE 091



SENSE BLADE 091
Wall Mount GEN12 Linear Light

Specifications

Switch Select
1,500 - 3,000 Lumens

CCT Select
3000K/3500K/4000K CCT

Wattage Select
7.5 - 30 Watts


Intertek

5 YEAR WARRANTY


Mounting




Wall Mount



Features

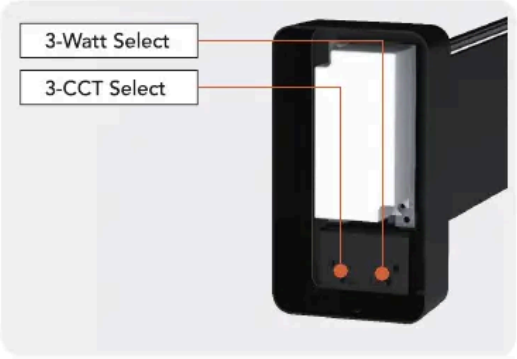

Beam Angles

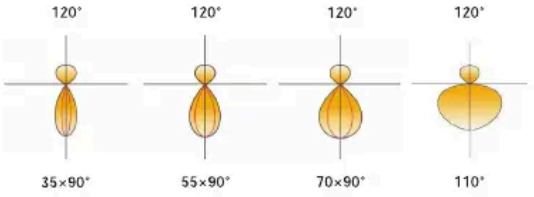

ITEM	Length	Wattage Select	Max Output Lumen Up 30%Down 70%	Beam Angle	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI
WL-12LSUD1FT15WB3DHV	1'	7.5W/10W/15W	1500lm	110°/ 35×90°/ 55×90°/ 70×90°	100lm/W (Black)	3000K 3500K 4000K	AC120-347V	0-10V (10%-100%)	>90
WL-12LSUD1.5FT22WB3DHV	1.5'	11W/16.5W/22W	2200lm						
WL-12LSUD2FT30WB3DHV	2'	20W/25W/30W	3000lm						