WISDOM LIGHT

Specification sheet
November 2026

Troffers

Stack Troffer

Stackable troffer, 2×2 ft and 2×4 ft

Project	
Type	
Date	



Stack Troffer is a centre-basket troffer in 2×2 ft and 2×4 ft sizes, designed to nest when packed so more units fit on a pallet and in a container. Wattage and CCT are selectable, with a PoE option.

Lumen output	1,950 to 5,850 lm
Colour temperature	3000K / 4000K / 5000K, selectable
Wattage	15 to 50 W

ETL | 5-year warranty | PoE option

STACK TROFFER



STACK TROFFER

2X2FT, 2X4FT

Specifications

Switch Select
1,950 - 5,850 Lumens

CCT Select
3000K/4000K/5000K CCT

Wattage Select
15 - 50 Watts

Intertek

5 YEAR WARRANTY

PoE POWER OVER ETHERNET

Features

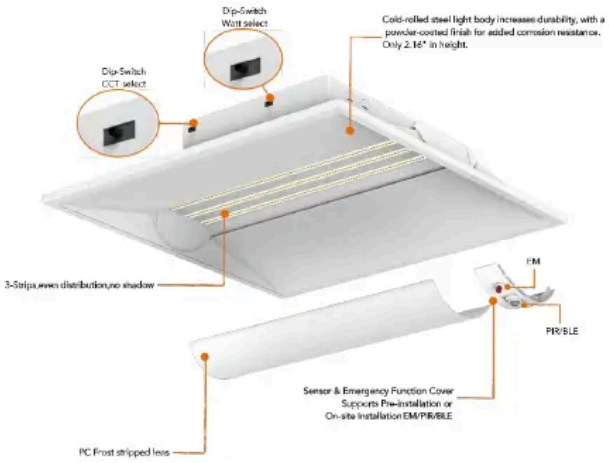



2x2FT Stack Pack 40#HQ Qty: 5430PCS
2x4FT Stack Pack 40#HQ Qty: 2664PCS

Standard Size

Troffer	Length	Wattage Select	Output Lumen	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI	Flicker Index
WL-4TRS2215/20/25DHV	2'X2'	15W/20W/25W	1950lm/2600lm/3250lm	130lm/W	3000K 3500K 4000K	AC120-347V	0-10V (10%-100%)	>80	<30%
WL-4TRS2224DHV	2'X2'	24W/30W/36W	3120lm						
WL-4TRS2230DHV			3900lm						
WL-4TRS2236DHV			4680lm						
WL-4TRS2416DHV	2'X4'	16W/24W/36W	2080lm						
WL-4TRS2424DHV			3120lm						
WL-4TRS2436DHV			4680lm						
WL-4TRS2424DHV	2'X4'	24W/36W/45W	3120lm						
WL-4TRS2436DHV			4680lm						
WL-4TRS2445DHV			5850lm						

Millimeter Size

Troffer	Length	Wattage Select	Output Lumen	Nominal Efficacy	CCT Select	Input Voltage	Dimmable	CRI	Flicker Index
WL-4TRS50050024DHV	500X500mm	24W/30W/36W	3120lm	130lm/W	3000K 3500K 4000K	AC120-347V	(0-10V 10%-100%)	>80	<30%
WL-4TRS50050030DHV			3900lm						
WL-4TRS50050036DHV			4680lm						
WL-4TRS50850824DHV	508X508mm	24W/30W/36W	3120lm						
WL-4TRS50850830DHV			3900lm						
WL-4TRS50850836DHV			4680lm						
WL-4TRS1500150030DHV	1500X500mm	30W/40W/50W	3120lm						
WL-4TRS1500150040DHV			3900lm						
WL-4TRS1500150050DHV			4680lm						
WL-4TRS148549530DHV	1485X495mm	30W/40W/50W	3120lm						
WL-4TRS148549540DHV			3900lm						
WL-4TRS148549550DHV			4680lm						
WL-4TRS74374324DHV	743X743mm	24W/30W/36W	3120lm						
WL-4TRS74374330DHV			3900lm						
WL-4TRS74374336DHV			4680lm						
WL-4TRS75075024DHV	750X750mm	24W/30W/36W	3120lm						
WL-4TRS75075030DHV			3900lm						
WL-4TRS75075036DHV			4680lm						

