Cylinders and downlights

Verse G2 Wet Location Cylinder

IP65 wet-location cylinder

Project	
Type	
Date	



The VERSE G2 is a wet-location architectural cylinder designed for commercial, hospitality, and residential spaces where refined aesthetics and reliable performance are equally important.

Lumen output	630 to 7,350 lm
Colour temperature	2700K / 3000K / 3500K / 4000K / 5000K, selectable
Wattage	9 to 70 W
Sizes	3" (⌀3.74"×H6.14"), 4" (⌀4.52"xH6.14"), 6" (⌀6.69"xH7.3"), 8" (⌀8.07"xH8.48")
Efficacy	70-90Lm/W (90CRI) / 90-105LmW (80CRI)
Voltage	120-347V
Dimming	3-in-1 Dimming: 0-10V, TRIAC / ELV
CRI	>90 / >80


ETL | 5-year warranty | Wet location

Ordering information

Model	Dimension	Watt Select	Beam Angle	Efficacy	Lumens	CCT	Voltage	Dimming	CRI
WL-2CLD3IN15WB5D3HV5A-VV-MM-YY-SS	3" (⌀3.74"×H6.14")	5W/7.5W/10W	20°/40°/60°	70-90Lm/W (90CRI) / 90-105LmW (80CRI)	630-1575 lm	5-Select CCT: 27K/30K/35K/40K/50K	120-347V	3-in-1 Dimming: 0-10V, TRIAC / ELV	>90 / >80
WL-2CLD4IN30WB5D3HV5A-VV-MM-YY-SS	4" (⌀4.52"xH6.14")	18W/24W/30W	20°/40°/60°	70-90Lm/W (90CRI) / 90-105LmW (80CRI)	1260-3150 lm	5-Select CCT: 27K/30K/35K/40K/50K	120-347V	3-in-1 Dimming: 0-10V, TRIAC / ELV	>90 / >80
WL-2CLD6IN40WB5D3HV5A-VV-MM-YY-SS	6" (⌀6.69"xH7.3")	20W/30W/40W	20°/40°/60°	70-90Lm/W (90CRI) / 90-105LmW (80CRI)	1400-4200 lm	5-Select CCT: 27K/30K/35K/40K/50K	120-347V	3-in-1 Dimming: 0-10V, TRIAC / ELV	>90 / >80
WL-2CLD6IN55WB5D3HV5A-VV-MM-YY-SS	6" (⌀6.69"xH7.3")	45W/50W/55W	20°/40°/60°	70-90Lm/W (90CRI) / 90-105LmW (80CRI)	3150-5775 lm	5-Select CCT: 27K/30K/35K/40K/50K	120-347V	3-in-1 Dimming: 0-10V, TRIAC / ELV	>90 / >80
WL-2CLD8IN55WB5D3HV5A-VV-MM-YY-SS	8" (⌀8.07"xH8.48")	35W/45W/55W	20°/40°/60°	70-90Lm/W (90CRI) / 90-105LmW (80CRI)	2450-5775 lm	5-Select CCT: 27K/30K/35K/40K/50K	120-347V	3-in-1 Dimming: 0-10V, TRIAC / ELV	>90 / >80
WL-2CLD8IN70WB3D3HVXX-VV-MM-YY-SS	8" (⌀8.07"xH8.48")	60W/65W/70W	15°/24°/38°/60°	70-90Lm/W (90CRI) / 90-105LmW (80CRI)	4200-7350lm	Single CCT: 27K,30K,35K,40K,50K	120-347V	3-in-1 Dimming: 0-10V, TRIAC / ELV	>90 / >80

IP65 VERSE G2



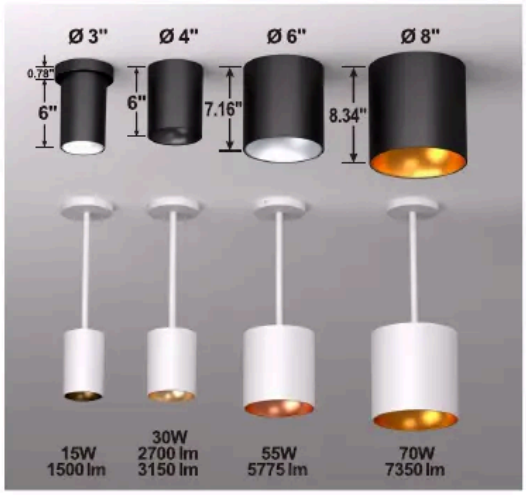

IP65 VERSE G2

Wet Location Cylinder

Specifications

Switch Select
630 - 7,350 Lumens

CCT Select
2700K/3000K/3500K/
4000K/5000K CCT

Wattage Select
9 - 70 Watts

Intertek

5 YEAR WARRANTY

Wet location

Features





Mounting



Optic Lens



Model	Dimension	Watt select	Lumens	Beam Angles	Efficacy	Voltage	CCT	Dimmable	CRI
WL-2CLD3IN15WB5 D3HV5A-VV-MM-YY-SS	3" (Ø3.74"×H6.14")	9W/12W/15W	630Lm-1350 lm(90CRI) 810Lm-1575 lm(80CRI)	20°/ 40°/ 60° Optics Lens	70-90 lm/W (90CRI) / 90-105 lm/W (80CRI)	120-347V / 120-277V	Select CCT 2700K/ 3000K/ 3500K/ 4000K/ 5000K	3-in-1 Dimming: 0-10V, TRIAC/ ELV	>90 / >80
WL-2CLD4IN30WB5 D3HV5A-VV-MM-YY-SS	4" (Ø4.52"xH6.14")	18W/24W/30W	1260Lm-2700 lm(90CRI) 1620Lm-3150 lm(80CRI)						
WL-2CLD6IN40WB5 D3HV5A-VV-MM-YY-SS	6" (Ø6.69"xH7.3")	20W/30W/40W	1400Lm-3600 lm(90CRI) 1800Lm-4200 lm(80CRI)						
WL-2CLD6IN55WB5 D3HV5A-VV-MM-YY-SS	6" (Ø6.69"xH7.3")	45W/50W/55W	3150Lm-4950 lm(90CRI) 4050Lm-5775 lm(80CRI)						
WL-2CLD8IN55WB5 D3HV5A-VV-MM-YY-SS	8" (Ø8.07"xH8.48")	35W/45W/55W	2450Lm-4950 lm(90CRI) 3150Lm-5775 lm(80CRI)						
WL-2CLD8IN70WB3 D3HVXX-VV-MM-YY-SS	8" (Ø8.07"xH8.48")	60W/65W/70W	4200Lm-6300 lm(90CRI) 5400Lm-7350 lm(80CRI)	20°/ 30°/ 45°/ 60° Aluminum Reflector			Single CCT 2700K, 3000K, 3500K, 4000K, 5000K		