Linear, direct/indirect, GEN 14

# Windows 787

GEN 14 open-centre linear light

| | |
|---|---|
| Project | |
| Type | |
| Date | |



Refined aesthetic with a center-through design provides scale without overhead bulk. Semi-direct (30/70) distribution delivers extra-wide direct and soft indirect light, allowing wider spacing and better lighting power density.

| | |
|---|---|
| Lumen output | 690 to 11,500 lm |
| Colour temperature | 3000K / 3500K / 4000K, selectable |
| Wattage | 6 to 100 W |
| Sizes | 2FT(600mm), 4FT(1200mm), 8FT(2400mm) |
| Efficacy | 115lm/W |
| Voltage | 120-347V / 120-277V |
| Dimming | 0-10V(1%-100%) |
| CRI | >90 |

ETL | 5-year warranty

## Ordering information

| Model | Dimension | Watt Select | Efficacy | Lumens | CCT Select | Voltage | Dimming | CRI |
|---|---|---|---|---|---|---|---|---|
| WL-14LSUD2FT25WB2D1HV | 2FT(600mm) | 15W/20W/25W | 115lm/W | 1725/2300/2875Lm | 30K/35K/40K | 120-347V / 120-277V | 0-10V(1%-100%) | >90 |
| WL-14LSUD4FT50WB2D1HV | 4FT(1200mm) | 30W/40W/50W | 115lm/W | 3450/4600/5750Lm | 30K/35K/40K | 120-347V / 120-277V | 0-10V(1%-100%) | >90 |
| WL-14LSUD8FT100WB2D1HV | 8FT(2400mm) | 60W/80W/100W | 115lm/W | 6900/9200/11500Lm | 30K/35K/40K | 120-347V / 120-277V | 0-10V(1%-100%) | >90 |
| WL-14LSUDL10WB2D1HV | L Pattern | 6W/8W/10W | 115lm/W | 690/920/1150Lm | 30K/35K/40K | 120-347V / 120-277V | 0-10V(1%-100%) | >90 |
| WL-14LSUDT10WB2D1HV | T Pattern | 6W/8W/10W | 115lm/W | 690/920/1150Lm | 30K/35K/40K | 120-347V / 120-277V | 0-10V(1%-100%) | >90 |
| WL-14LSUDC12WB2D1HV | X Pattern | 8W/10W/12W | 115lm/W | 690/920/1150Lm | 30K/35K/40K | 120-347V / 120-277V | 0-10V(1%-100%) | >90 |

# WINDOWS 787



## WINDOWS 787
### Open-center GEN14 Linear Light

## Specifications

Switch Select
**690-11,500 Lumens**

CCT Select
**3000K/3500K/4000K CCT**

Wattage Select
**6 - 100 Watts**

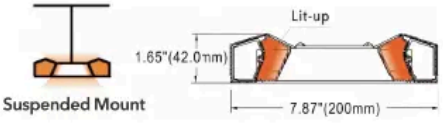


Suspended Mount



Linkable

Intertek

5 YEAR WARRANTY

## Features

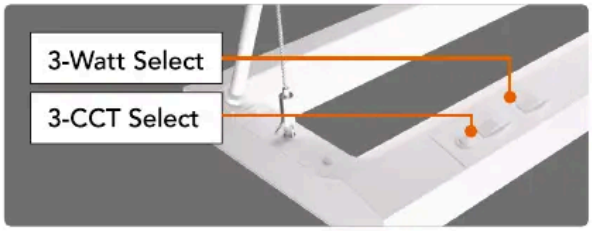




L-shape T-shape X-shape

## Feature Customization



indicate light & test switch

Optional side panel modules:
Bluetooth / PIR sensor or indicate light & test switch module.



Bluetooth / PIR sensor



Optional side panel colors:
Custom colors

| Windows 787 | Length | Wattage Select | Output Lumen Up 30%Down 70% | Nominal Efficacy | CCT Select | Input Voltage | Dimmable | CRI |
|---|---|---|---|---|---|---|---|---|
| WL-14LSUD2FT25WB2D1HV | 2' | 15W/20W/25W | 1725lm/2300lm/2875lm | 115 lm/W | 3000K 3500K 4000K | AC120-347V / AC120-277V | 0-10V (1-100%) | >90 |
| WL-14LSUD4FT50WB2D1HV | 4' | 30W/40W/50W | 3450lm/4600lm/5750lm | | | | | |
| WL-14LSUD8FT100WB2D1HV | 8' | 60W/80W/100W | 6900lm/9200lm/11500lm | | | | | |
| WL-14LSUDL10WB2D1HV | L Pattern | 6W/8W/10W | 690lm/920lm/1150lm | | | | | |
| WL-14LSUDT10WB2D1HV | T Pattern | 6W/8W/10W | 690lm/920lm/1150lm | | | | | |
| WL-14LSUDC12WB2D1HV | X Pattern | 8W/10/12W | 920lm/1150lm/1380lm | | | | | |