WISDOM LIGHT


Specification sheet
November 2026

Linear, direct/indirect, GEN 10

Windows 214

GEN 10 linear light with 360° illumination

Project	
Type	
Date	

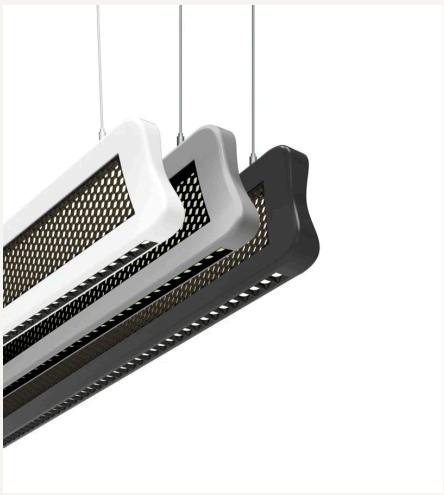

The Windows 214 is a designer pendant luminaire that combines architectural elegance with advanced optical performance. Its upward batwing distribution ensures uniform ceiling illumination and ambient fill, while the precise downward optics deliver comfortable, focused lighting.


Lumen output	2,970 to 10,080 lm
Colour temperature	2700K to 6500K, plus RGB
Wattage	33 to 112 W
Sizes	4FT(1188mm), 8FT(2383.8mm)
Efficacy	90lm/W, 80lm/W
Voltage	AC120-347V/120-277V
Dimming	0-10V(1-100%)
CRI	>90


ETL | 5-year warranty | Bluetooth mesh

Ordering information

Model	Length	Wattage	Efficacy	Lumens	CCT Select	Voltage	Dimming	CRI
WL-10LSUD4FT56WB2D1HV	4FT(1188mm)	33W/45W/56W Select	90lm/W	2970Lm/4050Lm/5040Lm	30K/35K/40K	AC120-347V/120-277V	0-10V(1-100%)	>90
WL-10LSUD8FT112WB2D1HV	8FT(2383.8mm)	66W/90W/112W Select	90lm/W	5940Llm/8100Lm/10080Lm	30K/35K/40K	AC120-347V/120-277V	0-10V(1-100%)	>90
WL-10LSUD4FT56WBHV	4FT(1188mm)	56W	80lm/W	4480Lm	Up&Down 2700-6500K Middle RGB	AC120-347V/120-277V	0-10V(1-100%)	>90
WL-10LSUD8FT112WBHV	8FT(2383.8mm)	112W	80lm/W	8960Lm	Up&Down 2700-6500K Middle RGB	AC120-347V/120-277V	0-10V(1-100%)	>90

WINDOWS 214

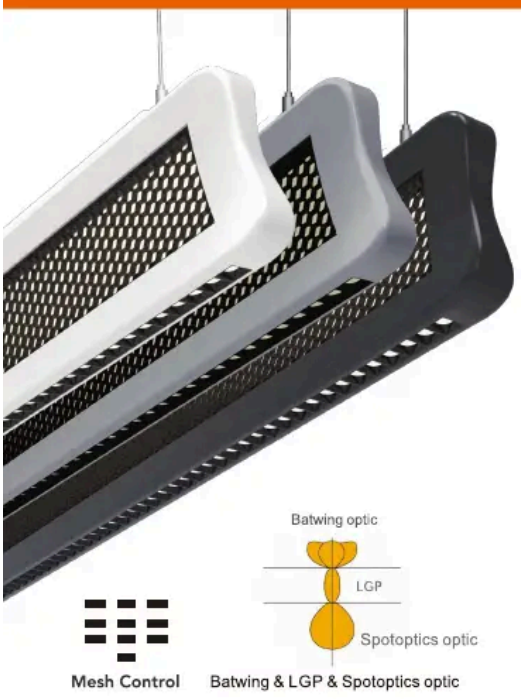



WINDOWS 214

Gen10 Linear Light with 360 Illumination

Specifications

Switch Select
2,970- 10,080 Lumens

CCT Select
2700K - 6500K+RGB

Wattage Select
33 - 112 Watts


Intertek

5 YEAR WARRANTY




Mesh + RGB

Features

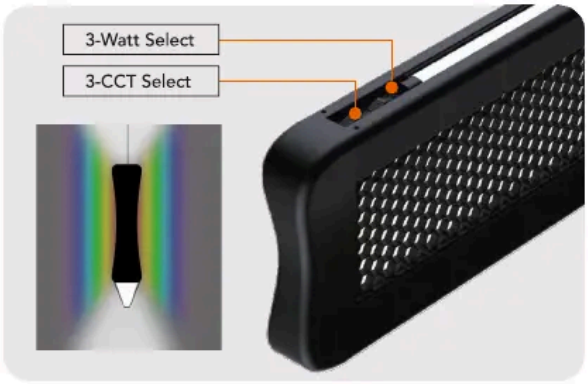

Beam Angles

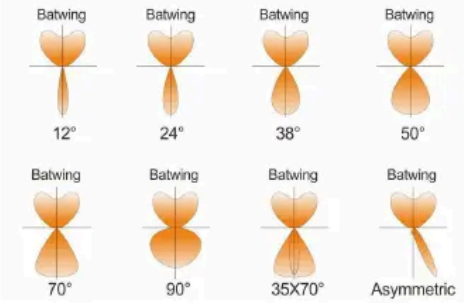

Windows 214	Length	Wattage	Output Lumen	Nominal Efficacy	CCT	Input Voltage	Dimmable	CRI
			Up 18% Middle 28% Down 54%					
WL-10LSUD4FT56WB2D1HV	4'	33W/45W/56W Select	2970lm/4050lm/5040lm	90lm/W	3000K 3500K 4000K Select	AC120-347V	(1%-100%) 0-10V	>90
WL-10LSUD8FT112WB2D1HV	8'	66W/90W/112W Select	5940lm/8100lm/10080lm					
WL-10LSUD4FT56WBHV (BLE)	4'	56W	4480lm	80lm/W	Up & Down 2700-6500K Middle RGB	AC120-347V	Lumos Mesh control	>90
WL-10LSUD8FT112WBHV(BLE)	8'	112W	8960lm					